

**FIG. 1A**  
(PRIOR ART)

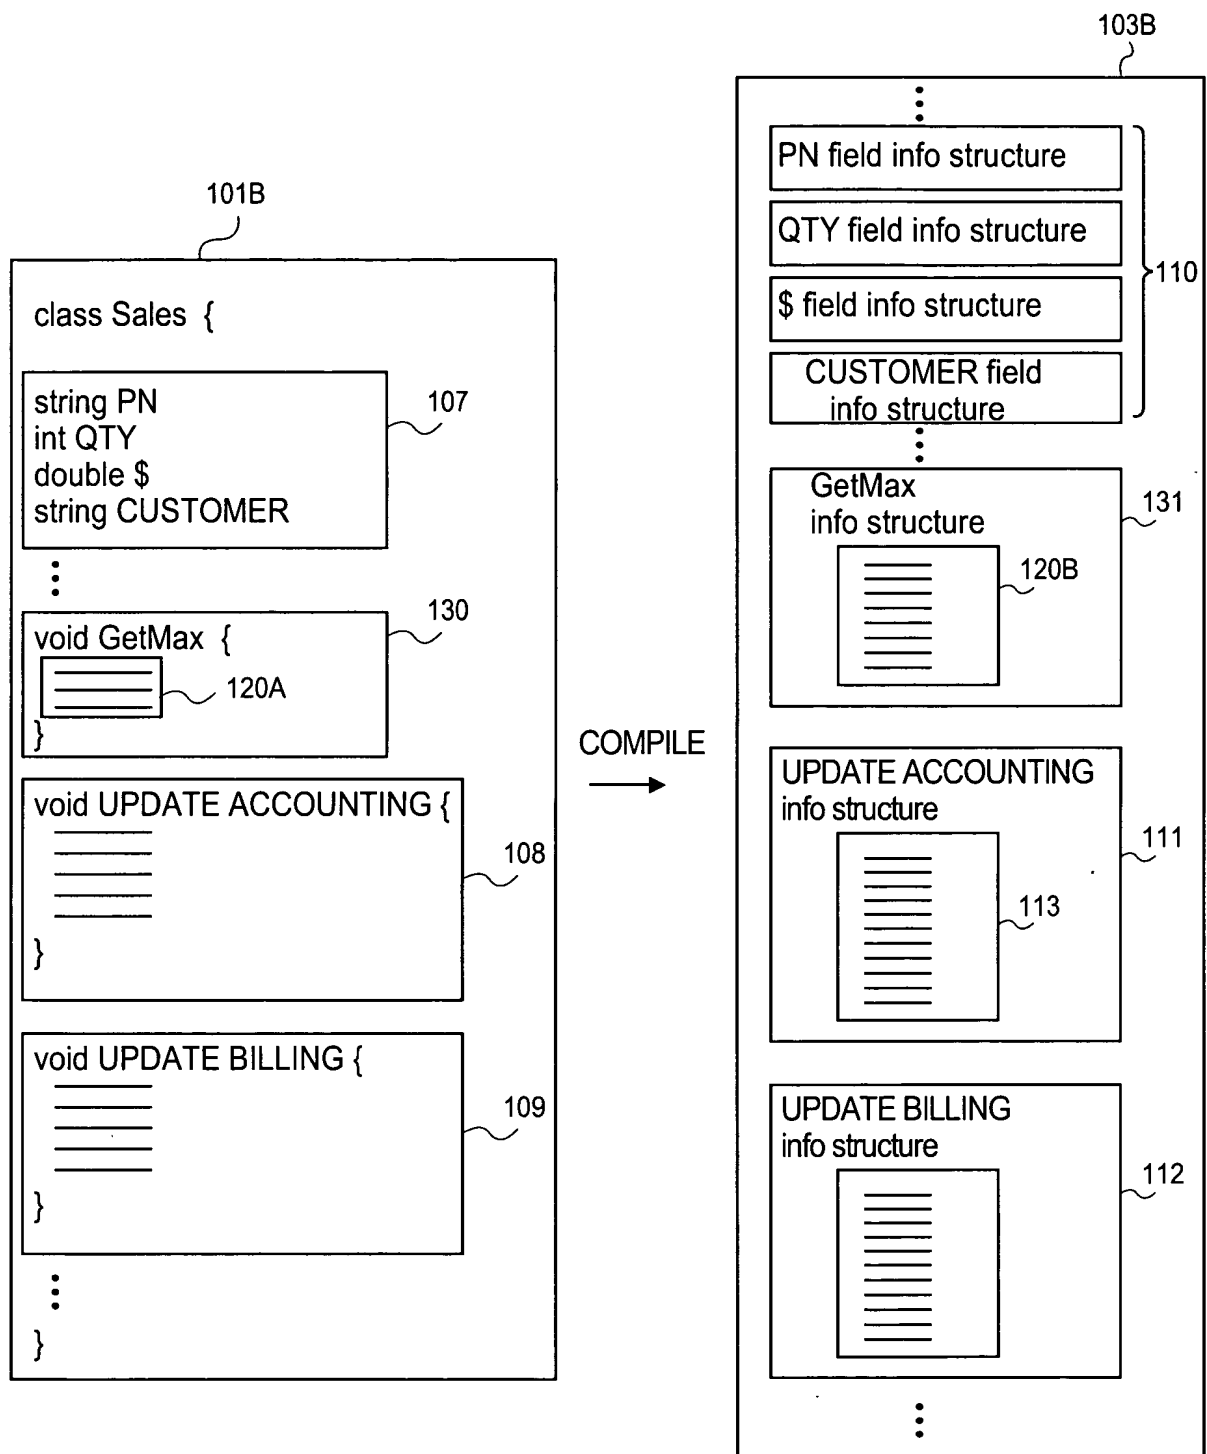
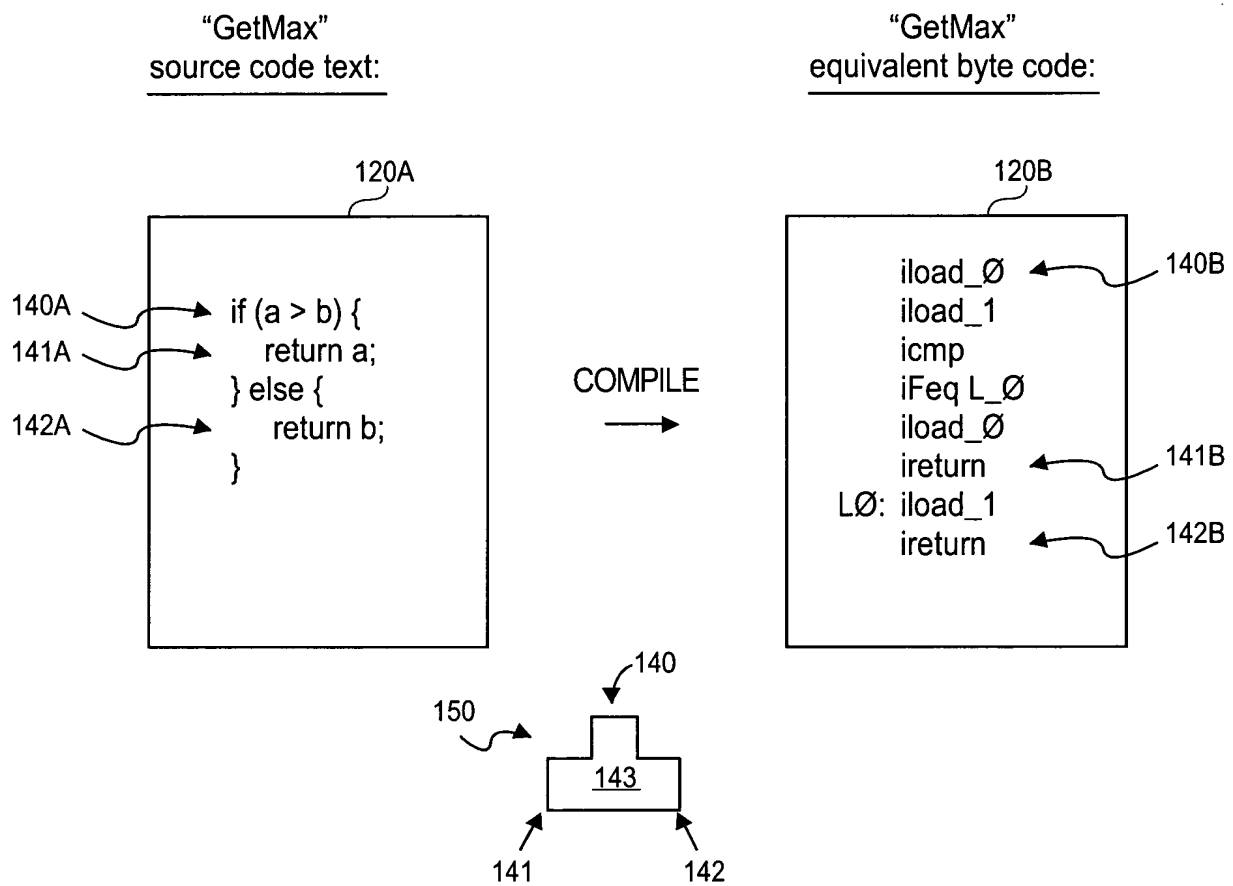
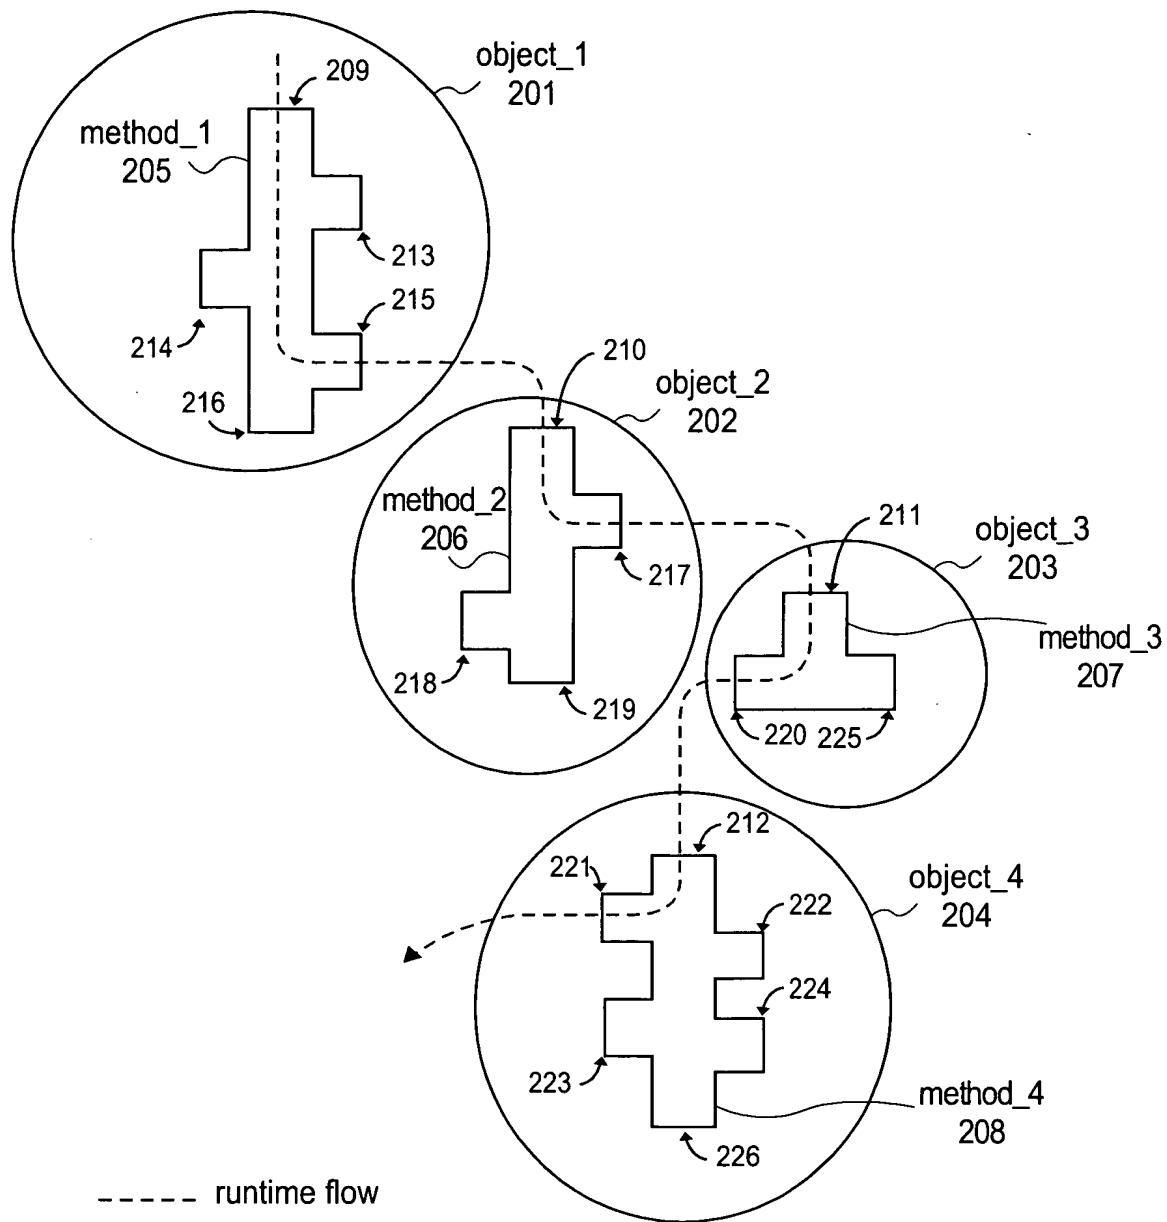


FIG. 1B  
(PRIOR ART)



**FIG. 1C**  
(PRIOR ART)



**FIG. 1D**  
(PRIOR ART)

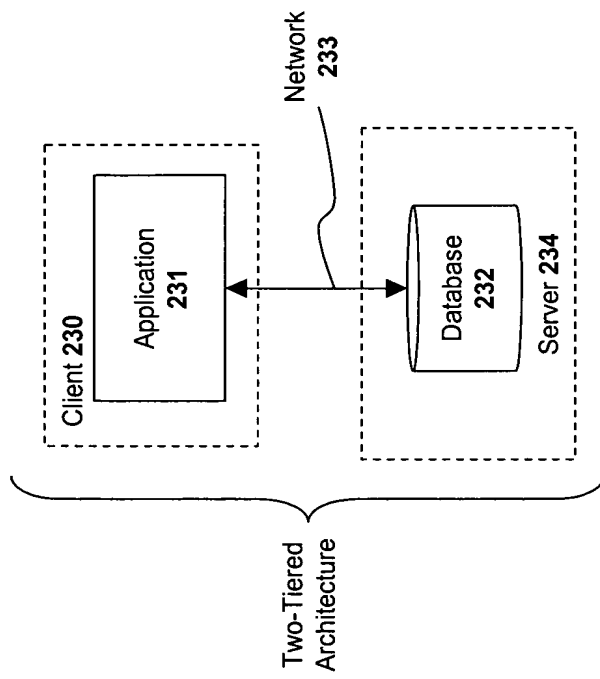
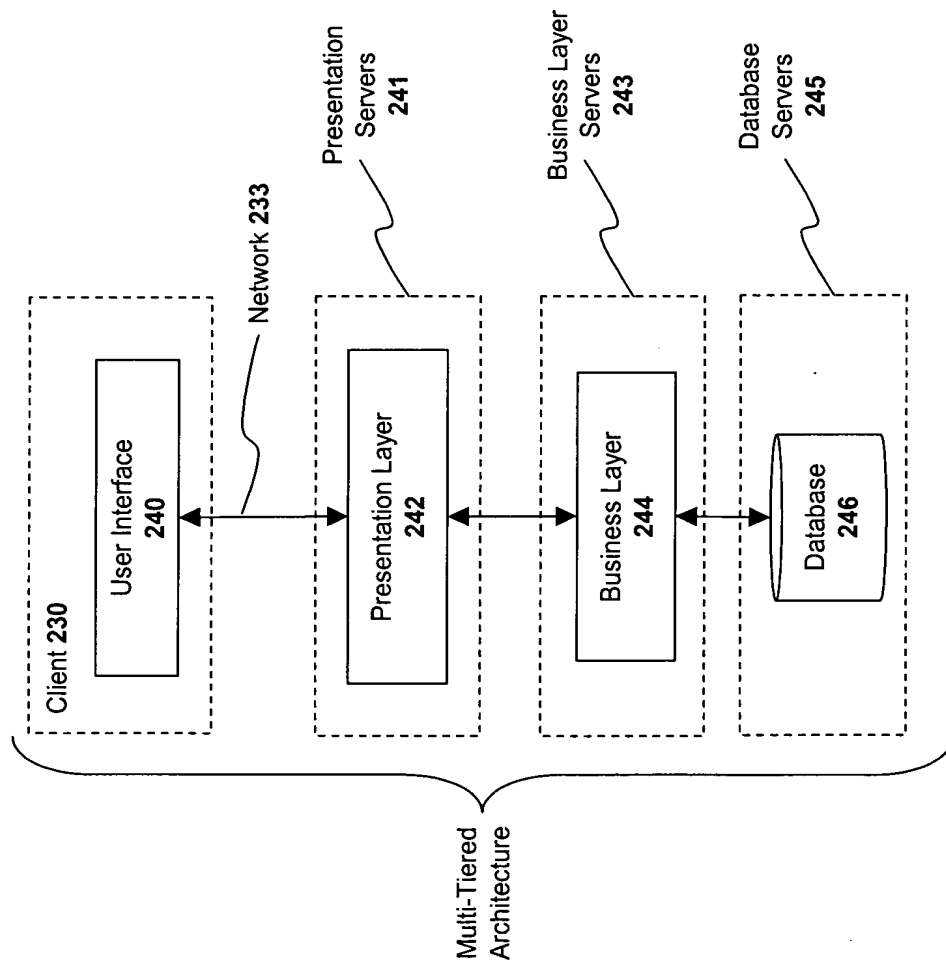
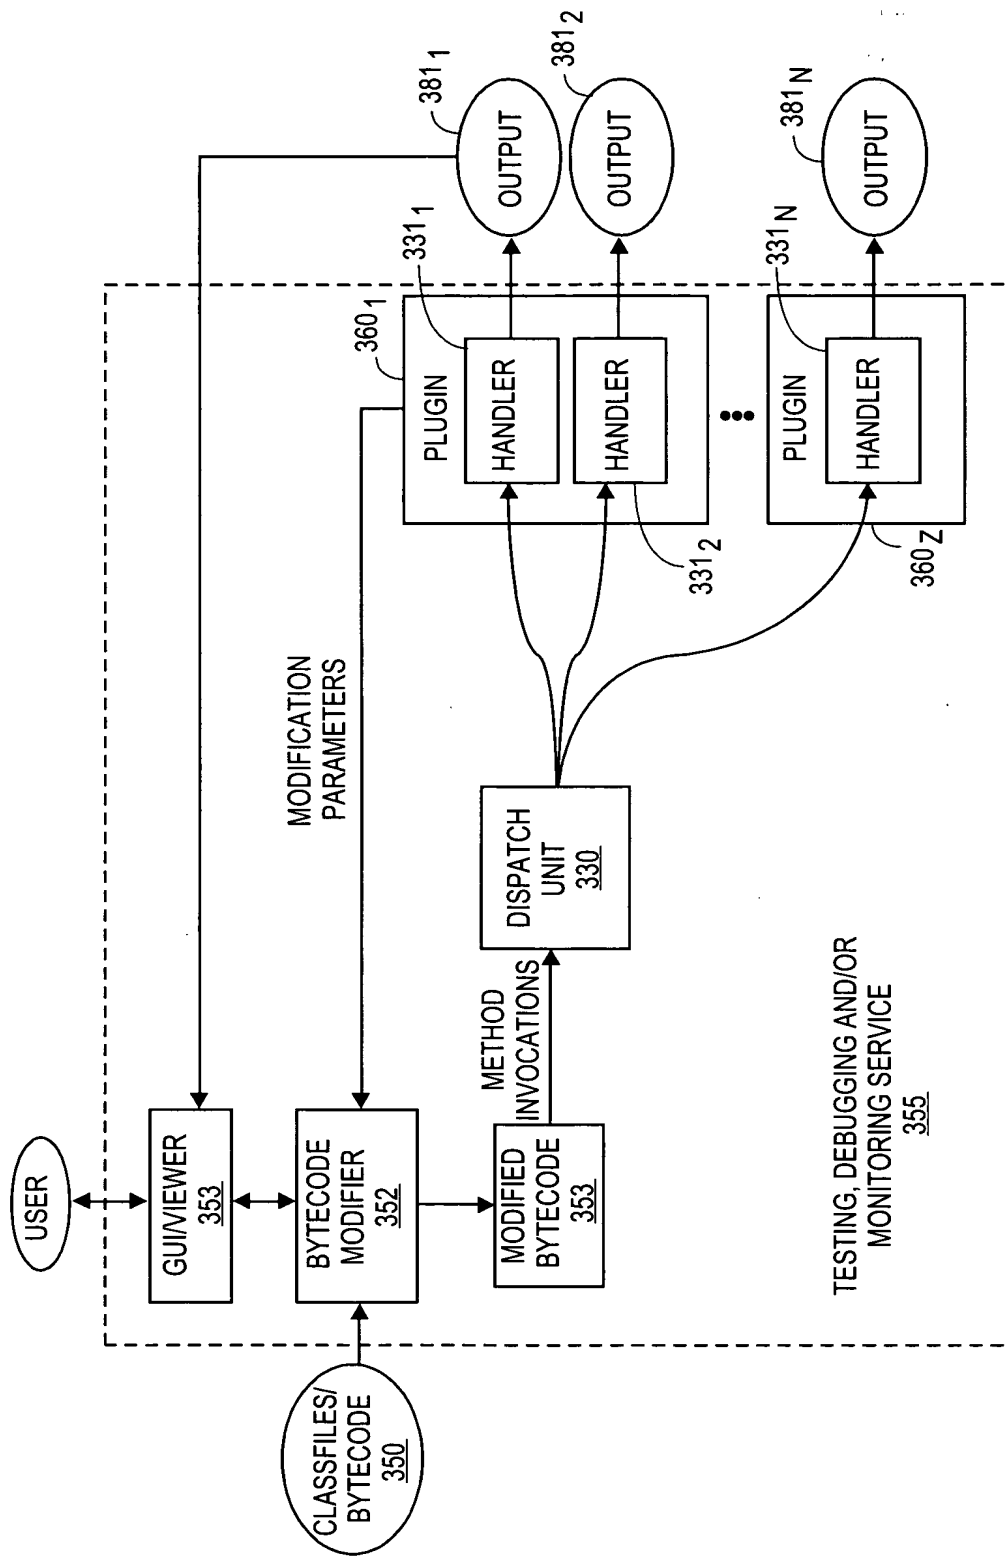


FIG. 2A  
(prior art)



**FIG. 2B**  
(prior art)



**FIG. 3**

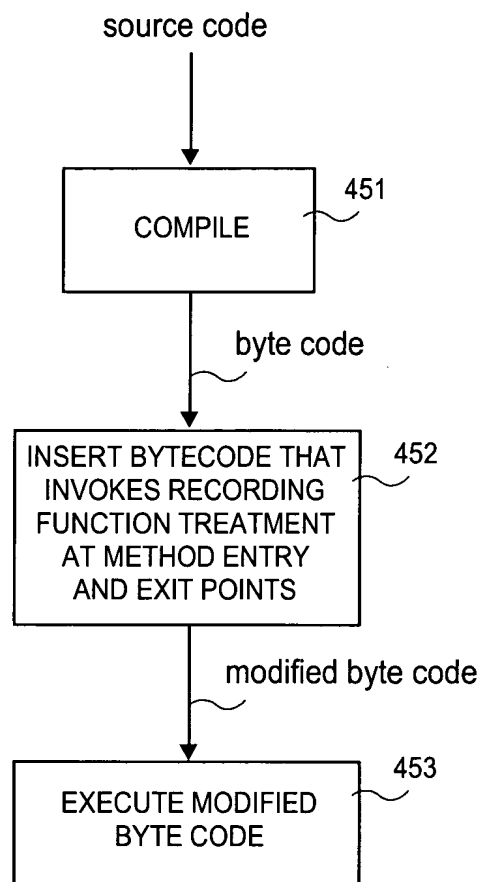


FIG. 4A



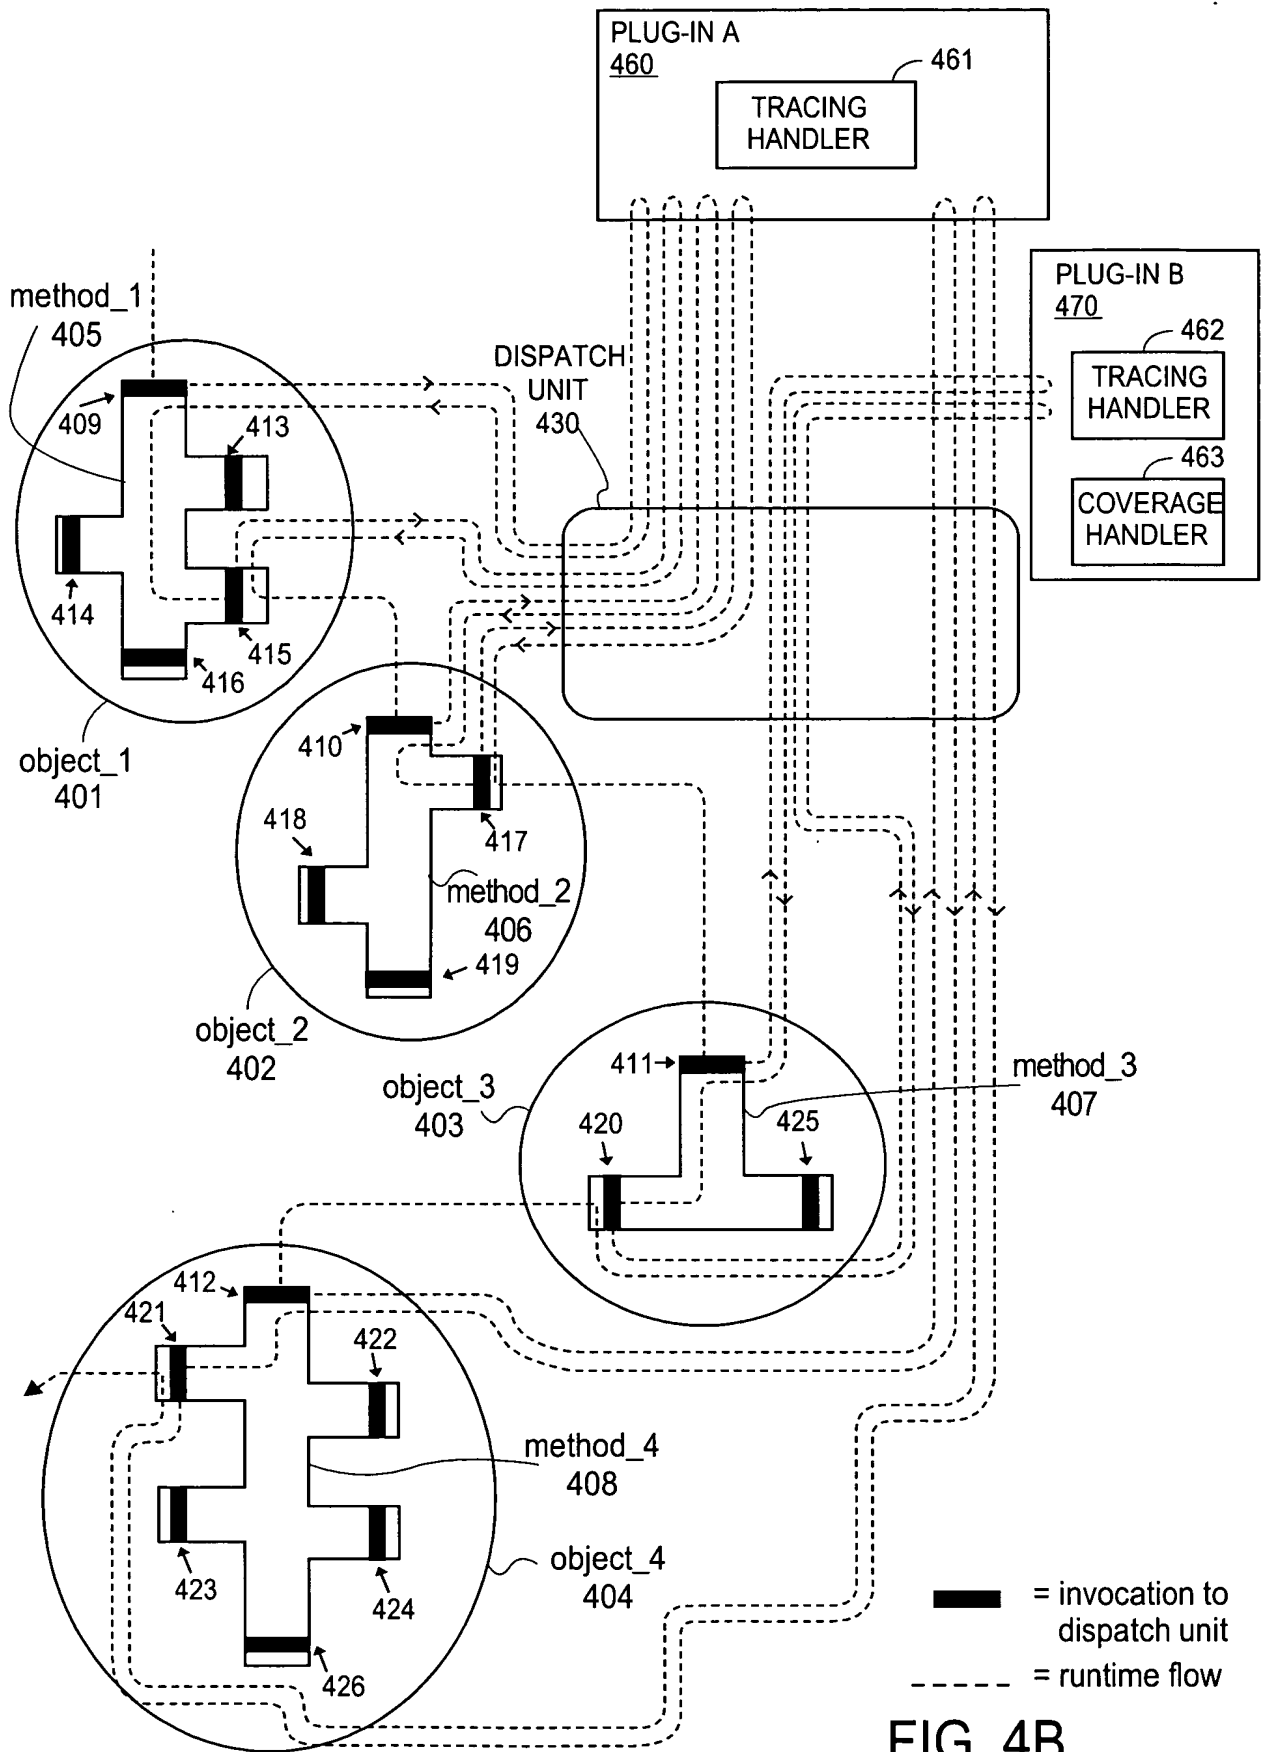


FIG. 4B

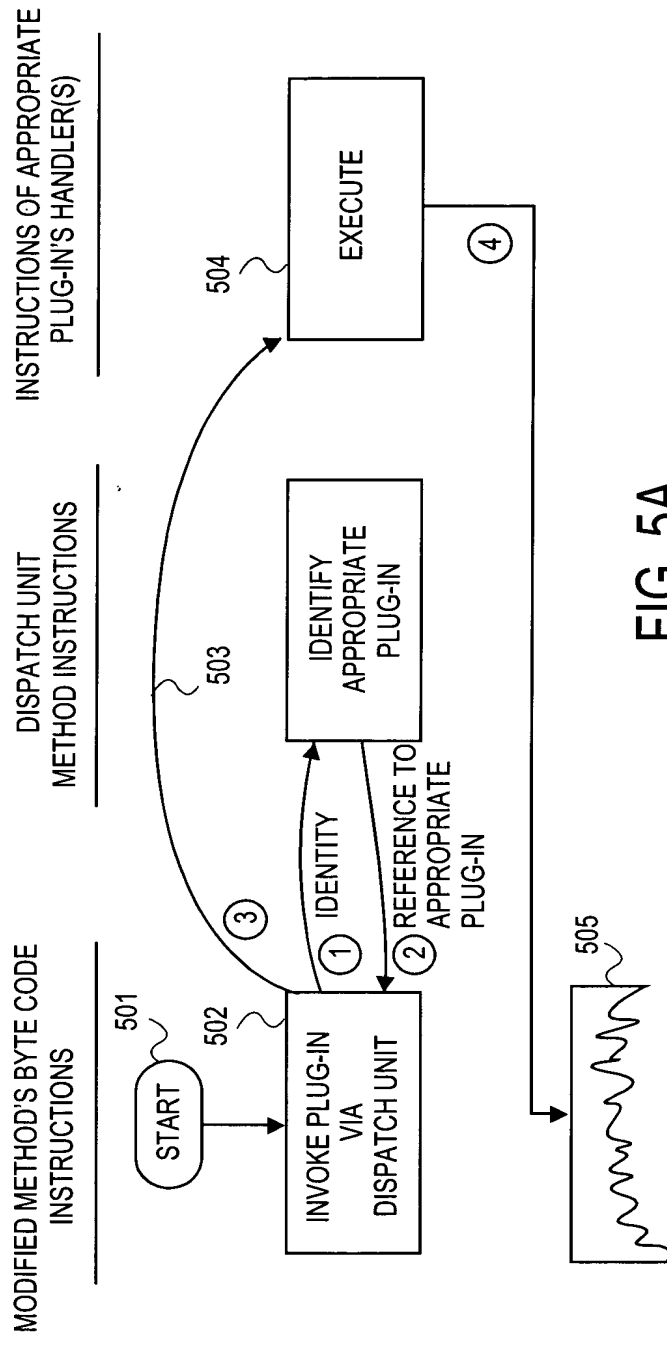


FIG. 5A

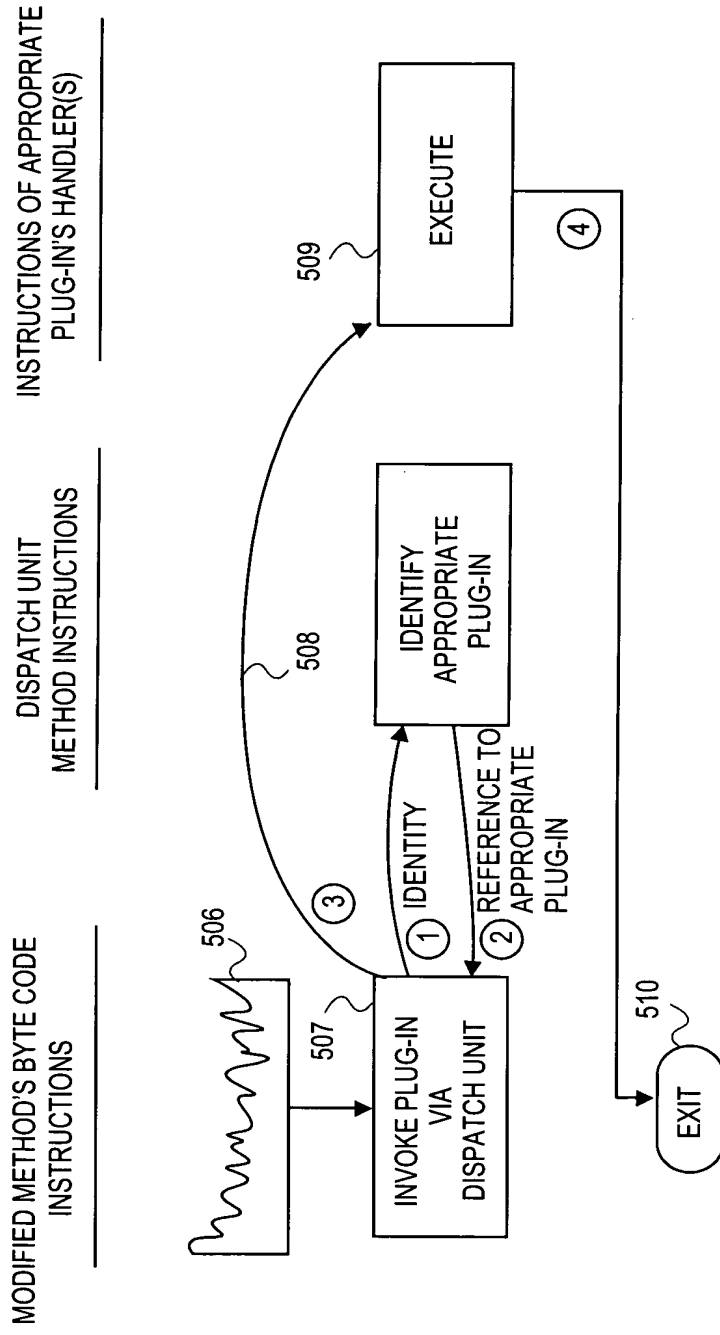


FIG. 5B

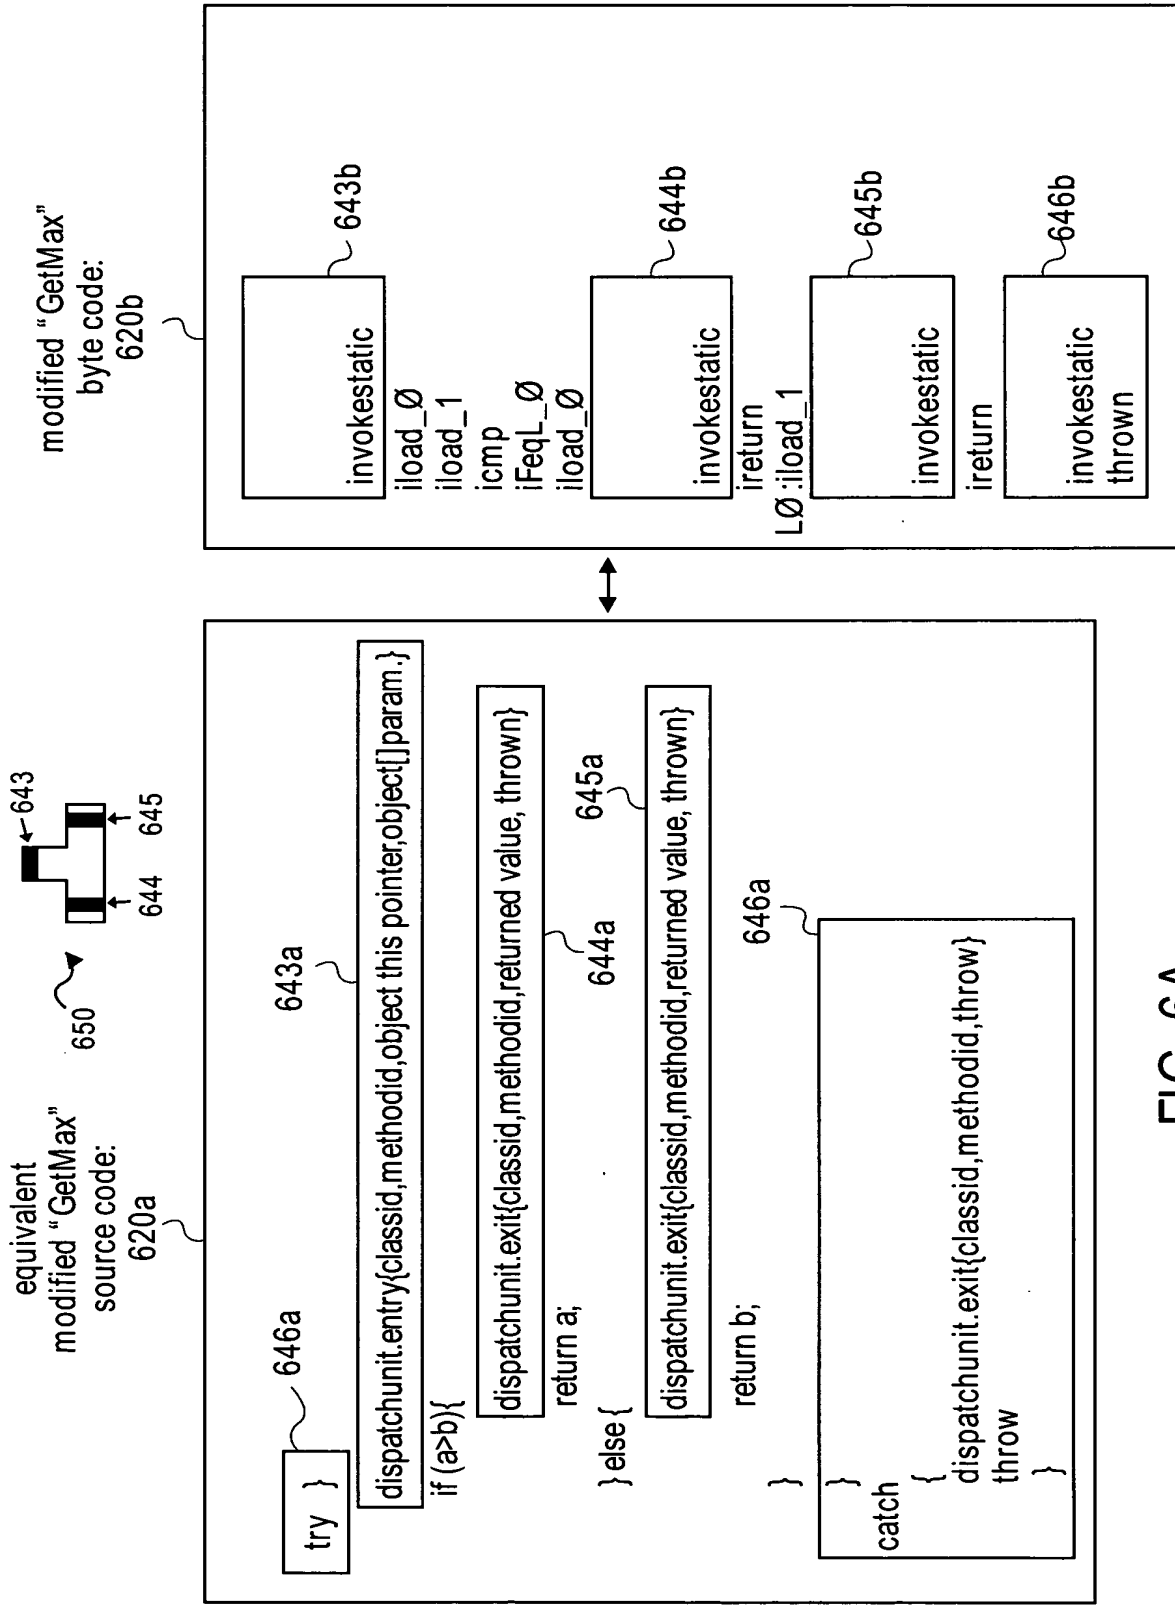


FIG. 6A

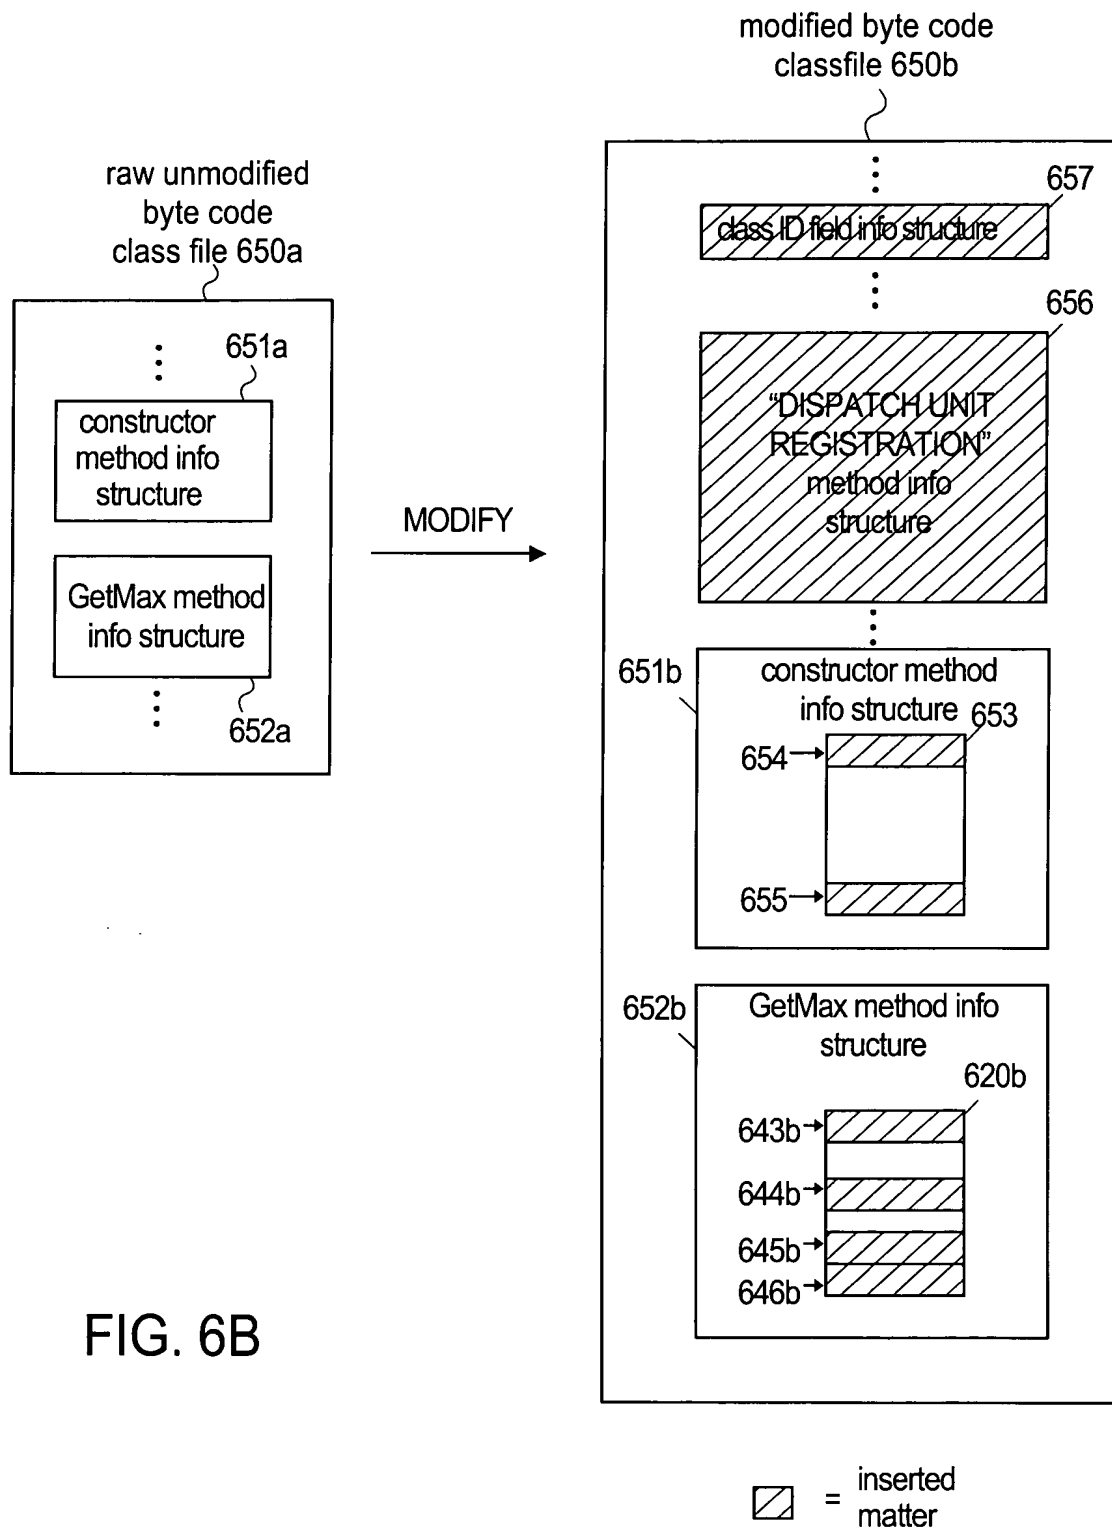


FIG. 6B

701

|            | INVOKING METHOD                                      | PLUG IN MODULE |
|------------|--|----------------|
| (method_1) | C <sub>1</sub> , M <sub>1</sub> , args <sub>11</sub> | PIM_A          |
| (method_2) | C <sub>1</sub> , M <sub>2</sub> , args <sub>12</sub> | PIM_A          |
| (method_3) | C <sub>2</sub> , M <sub>1</sub> , args <sub>21</sub> | PIM_B          |
| (method_4) | C <sub>3</sub> , M <sub>1</sub> , args <sub>31</sub> | PIM_A          |

FIG. 7

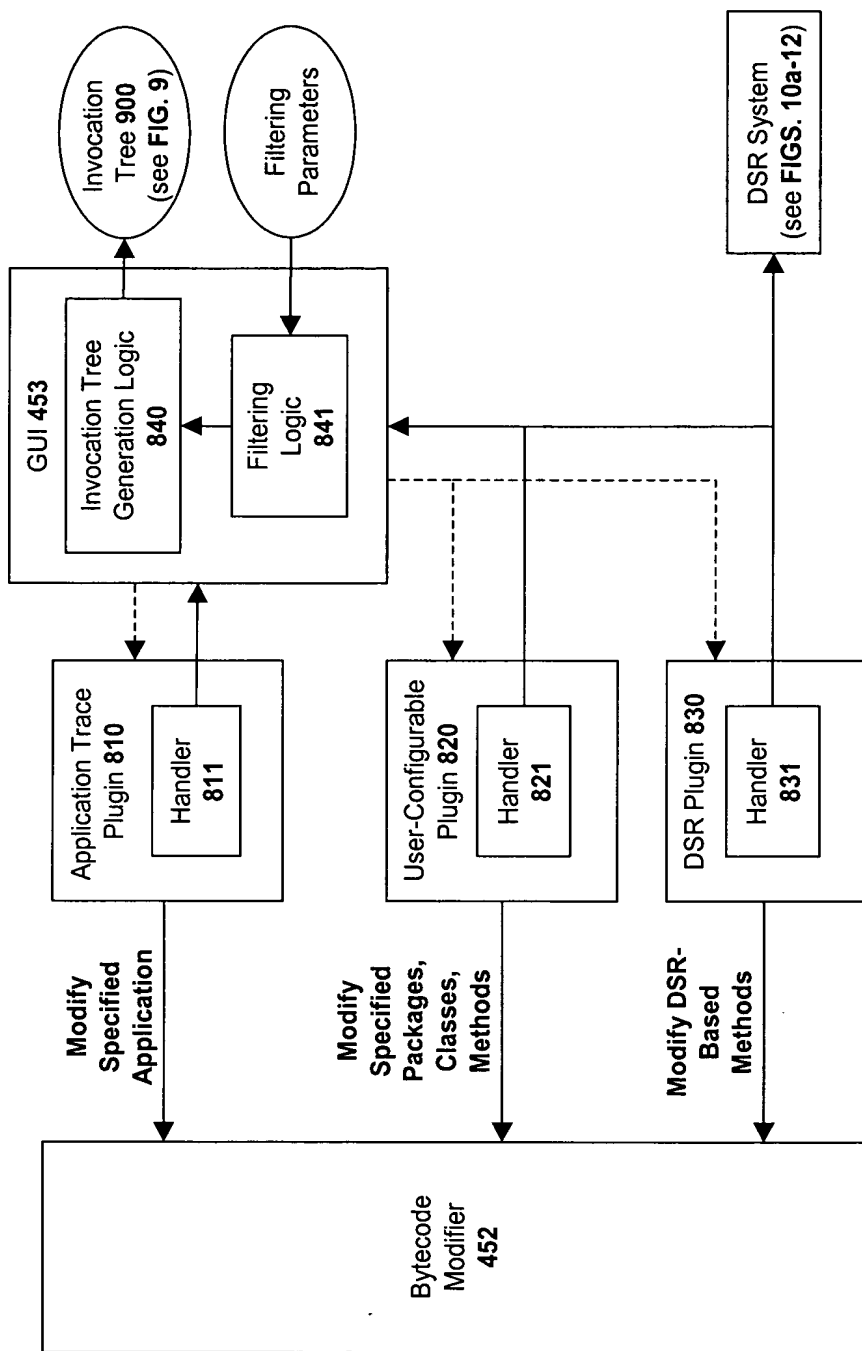


FIG. 8

# Invocation Tree

900

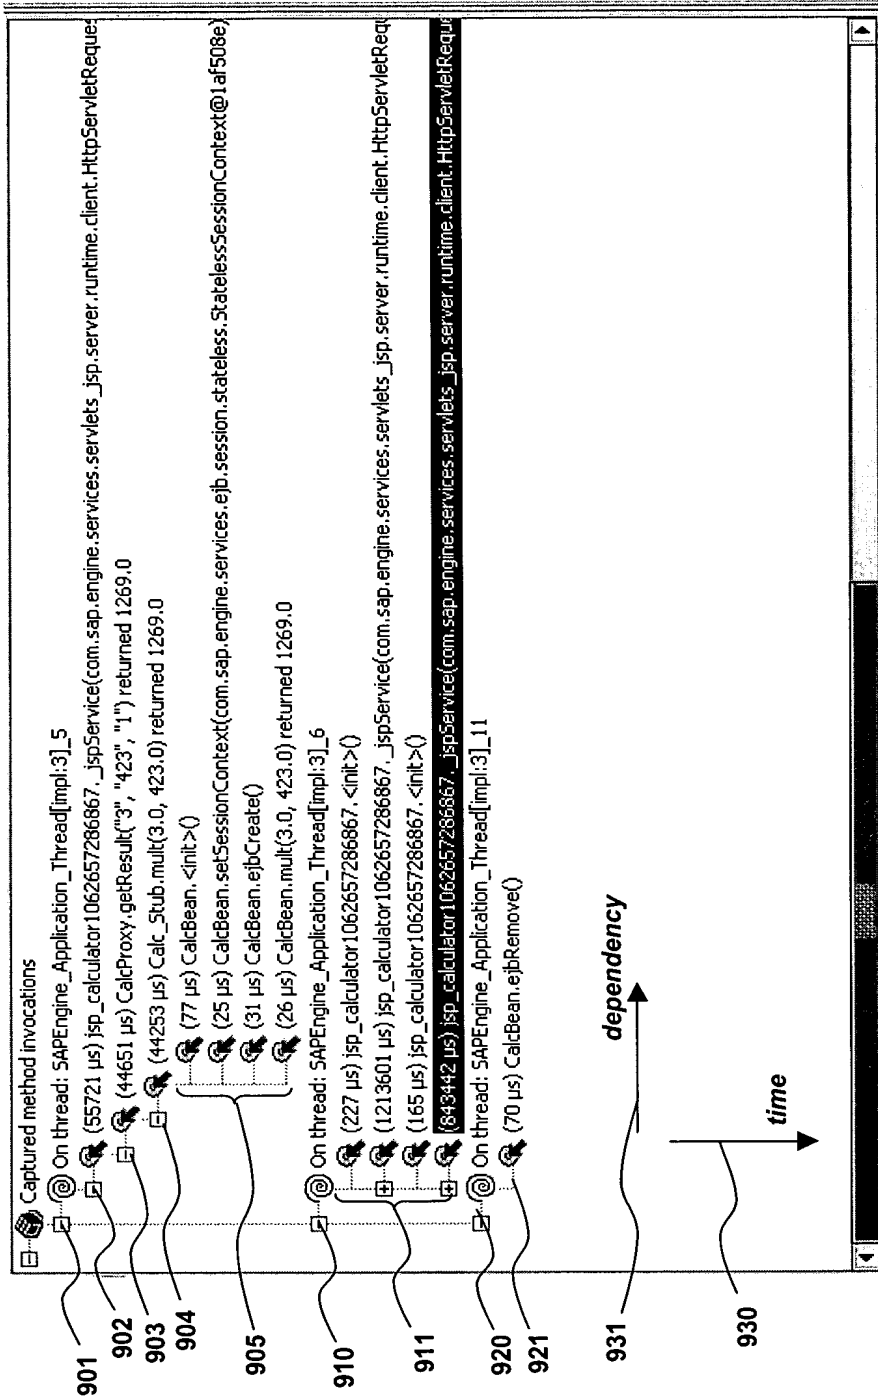


FIG. 9A



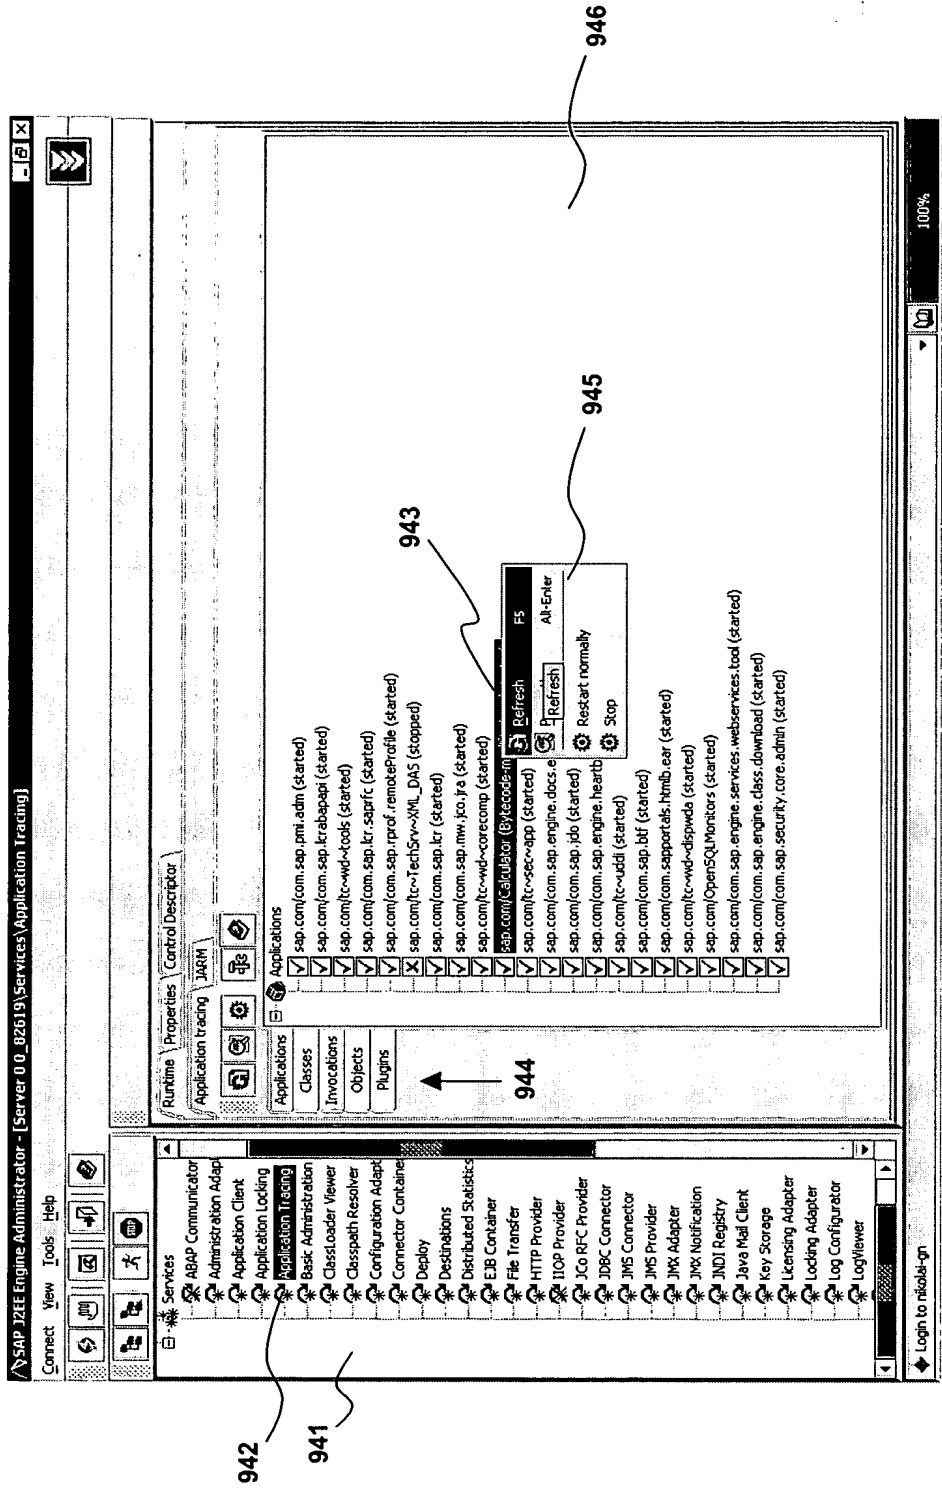


FIG. 9B

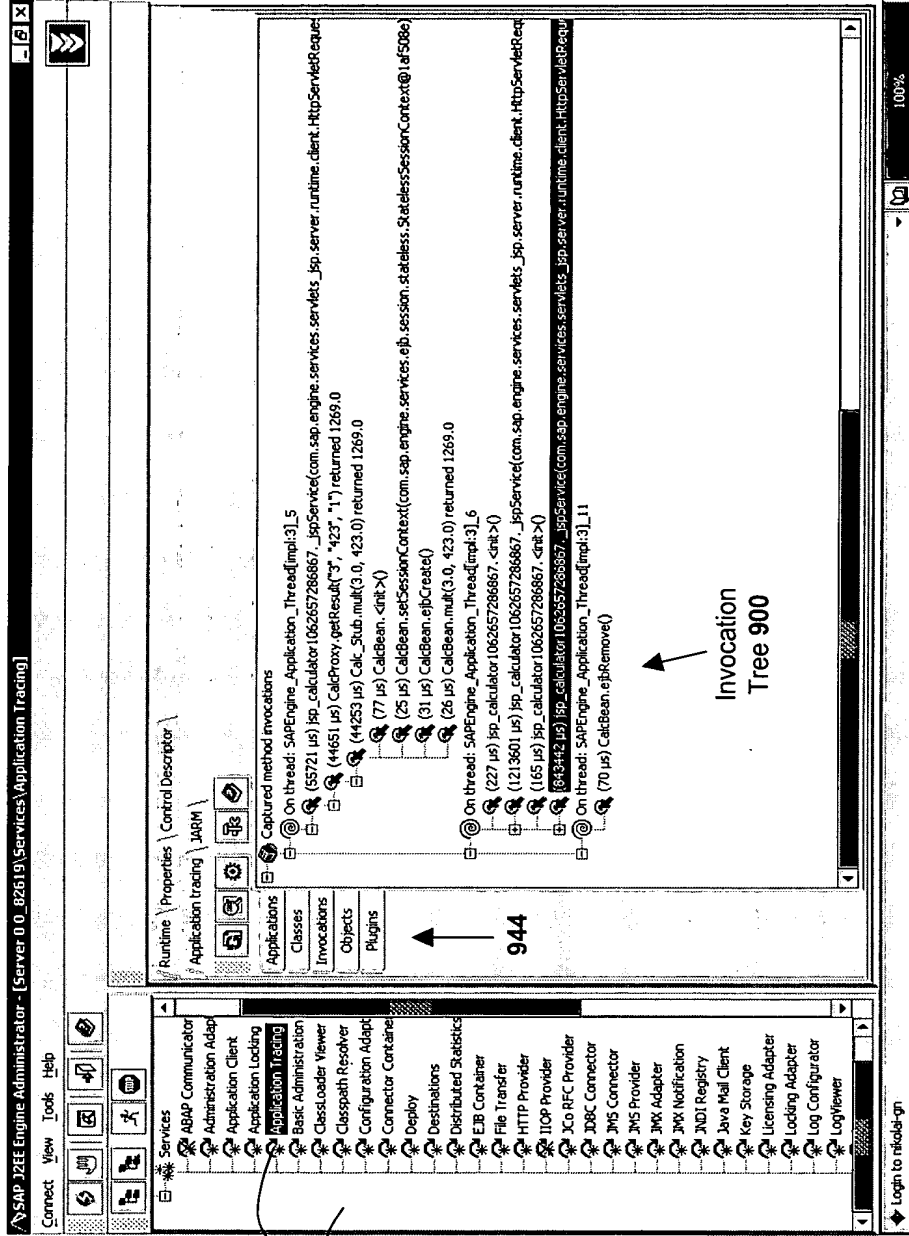


FIG. 9C



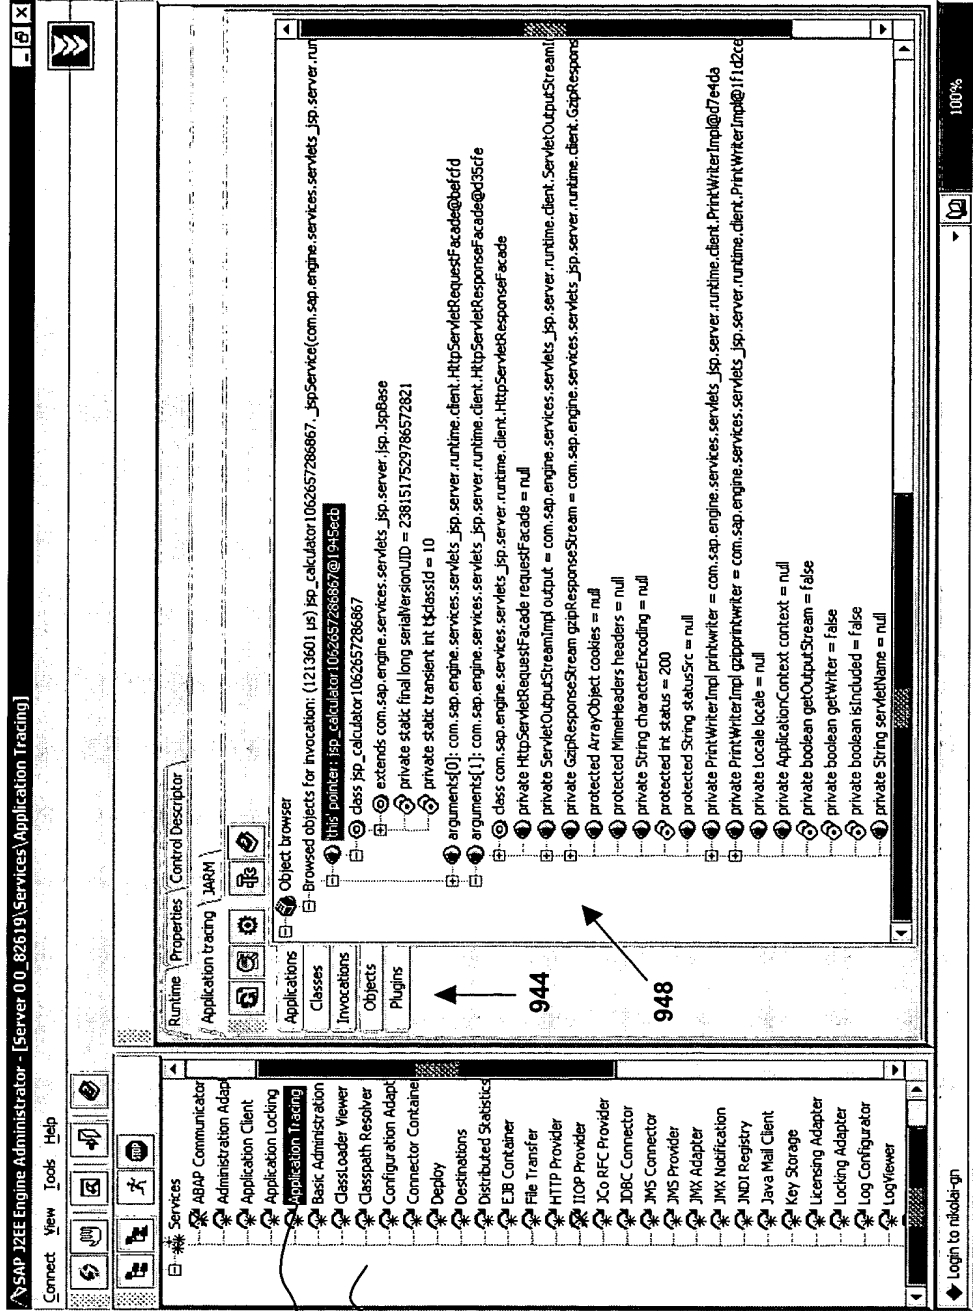


FIG. 9E

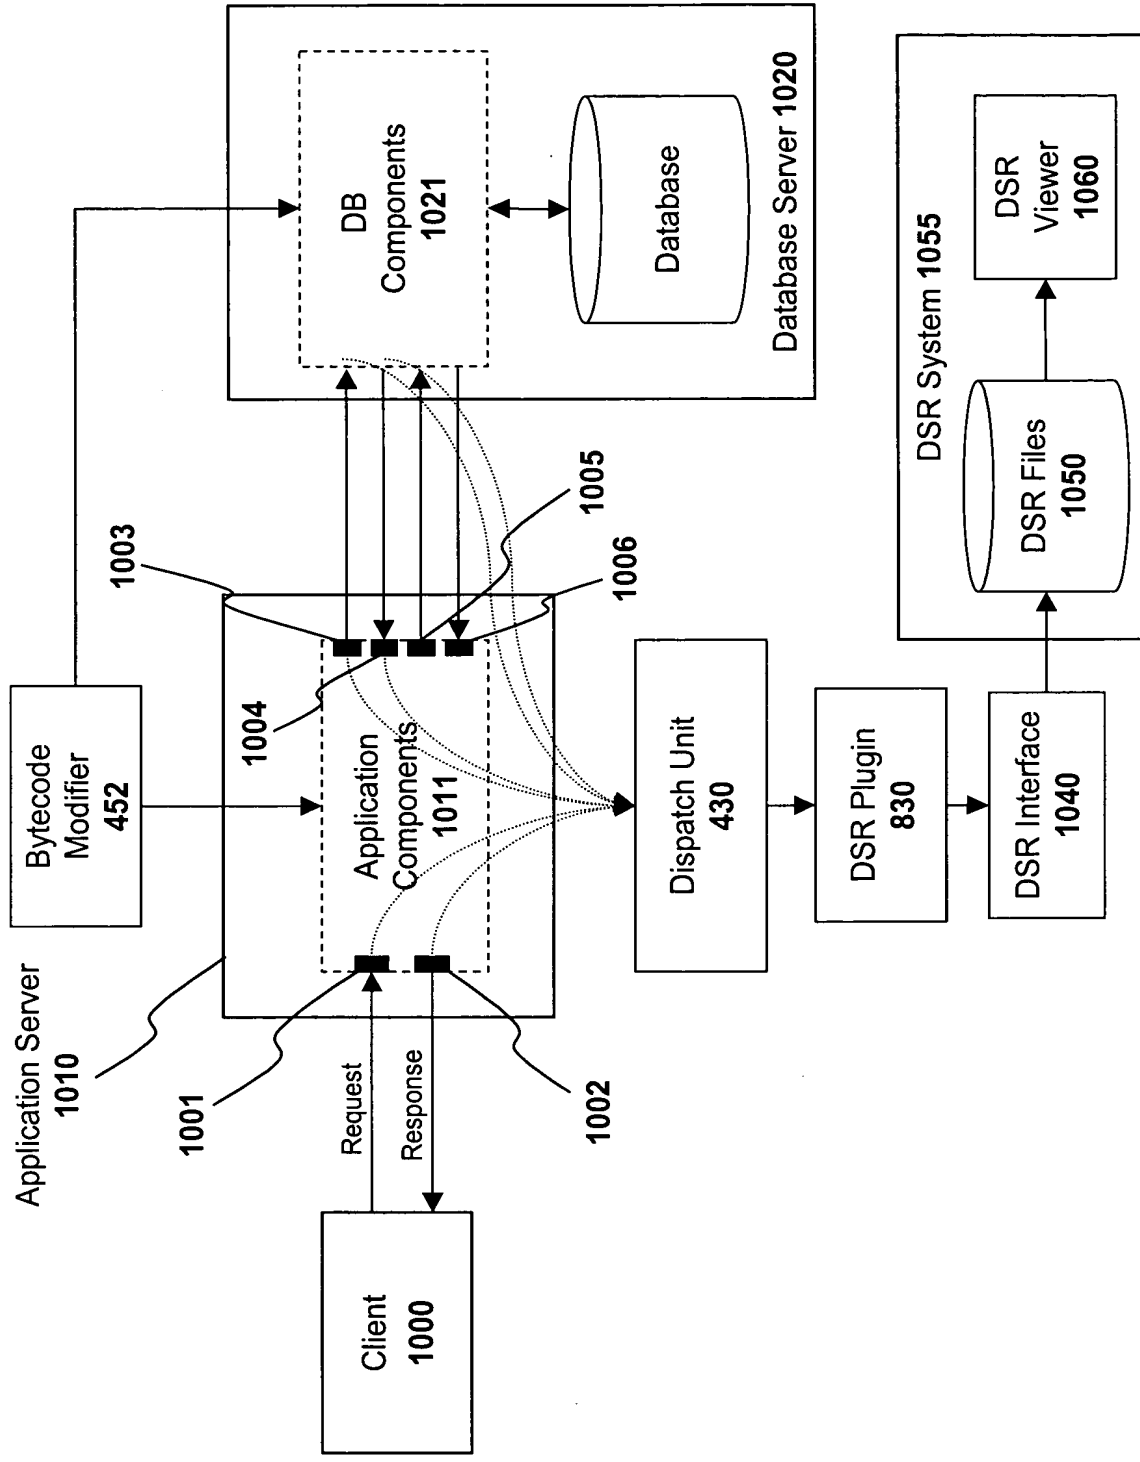


FIG. 10A

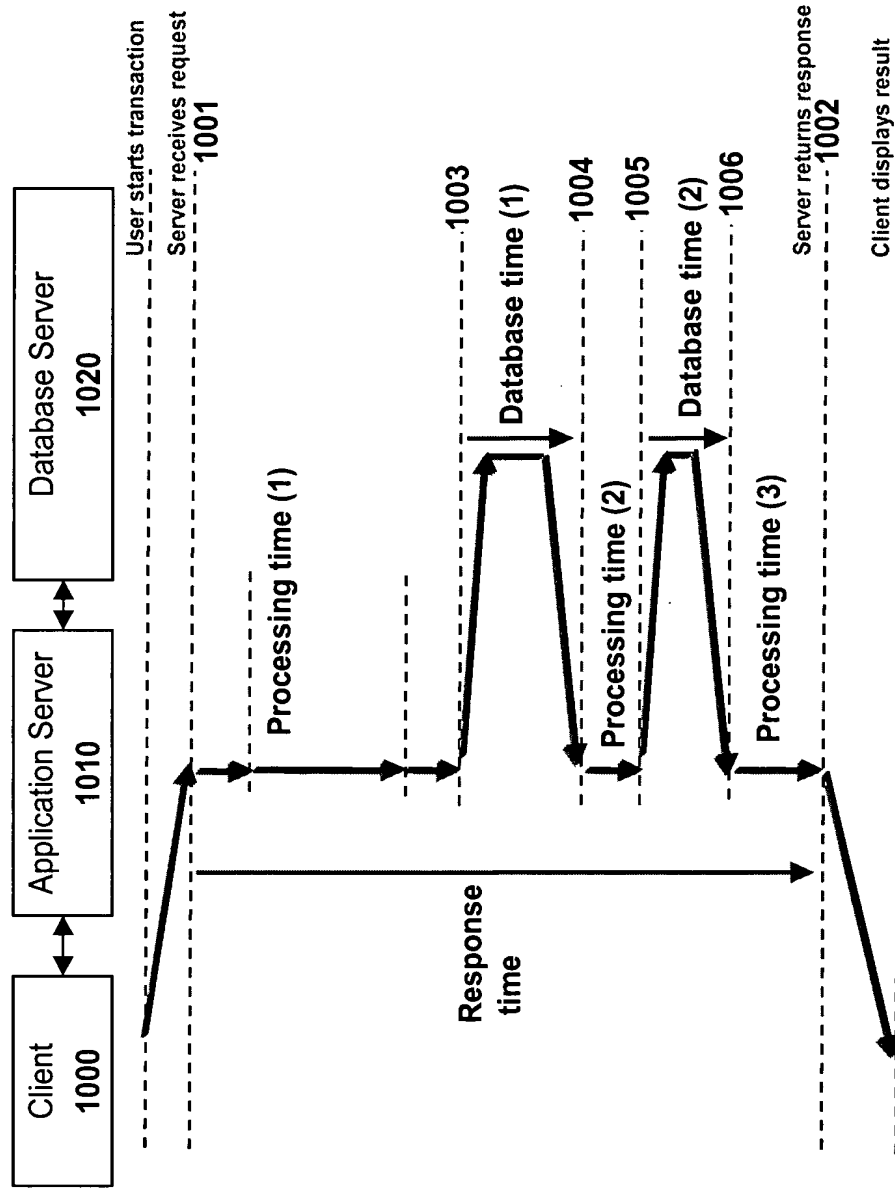


FIG. 10B

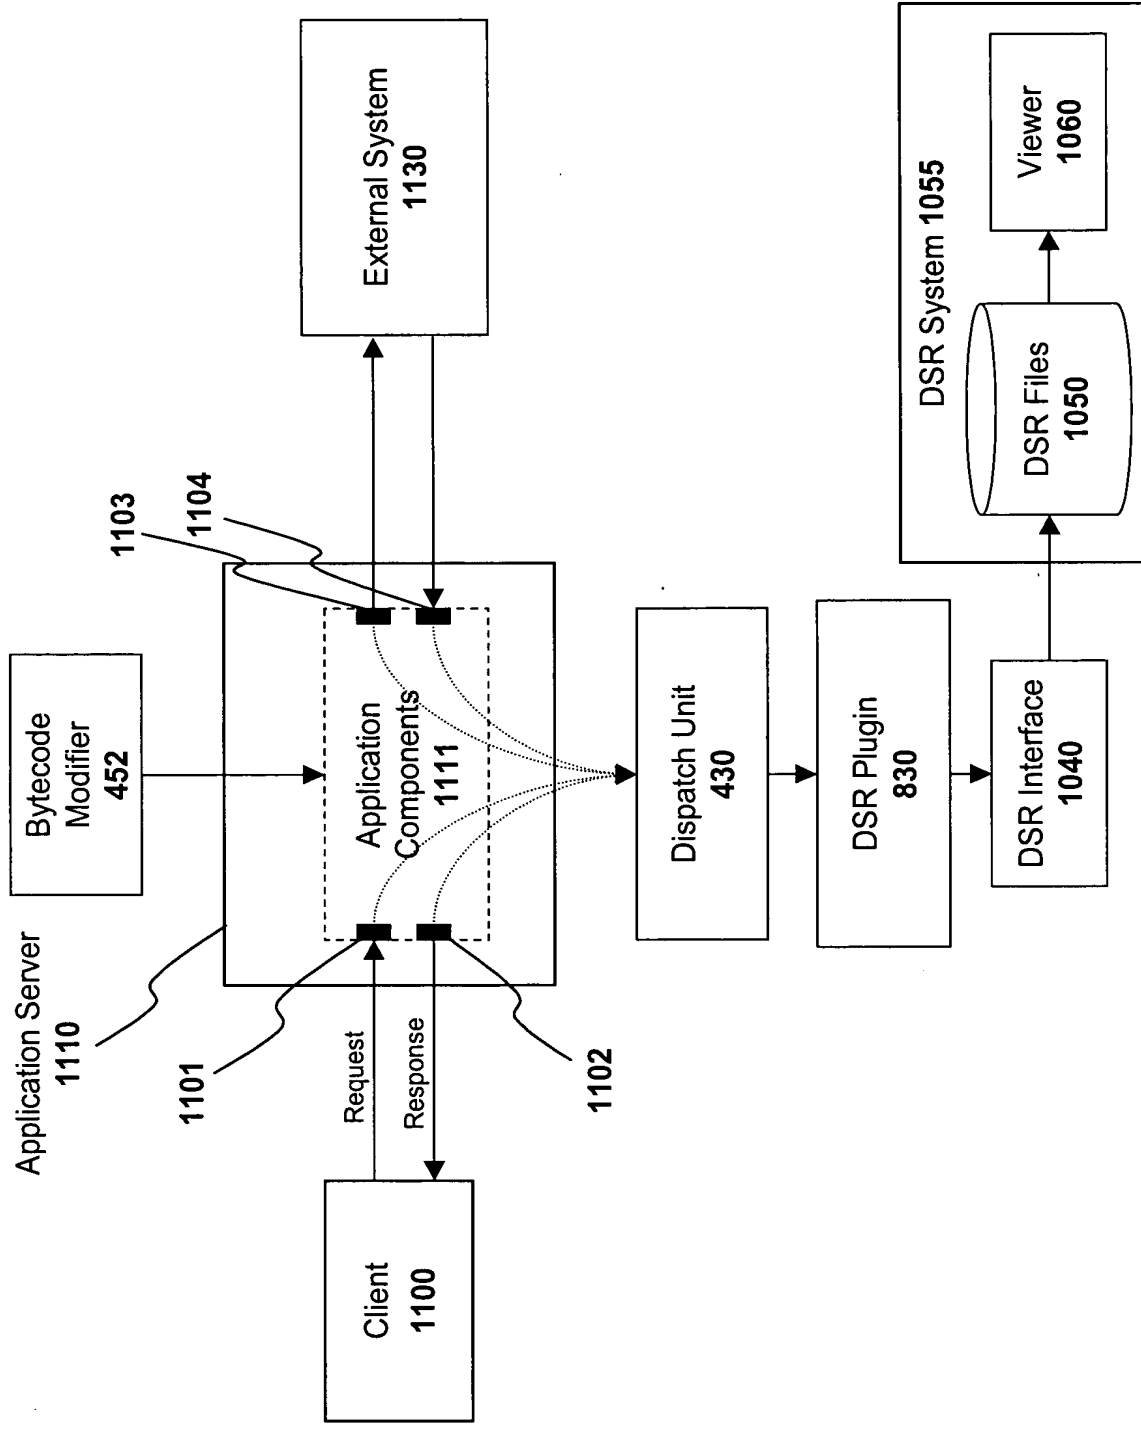


FIG. 11A

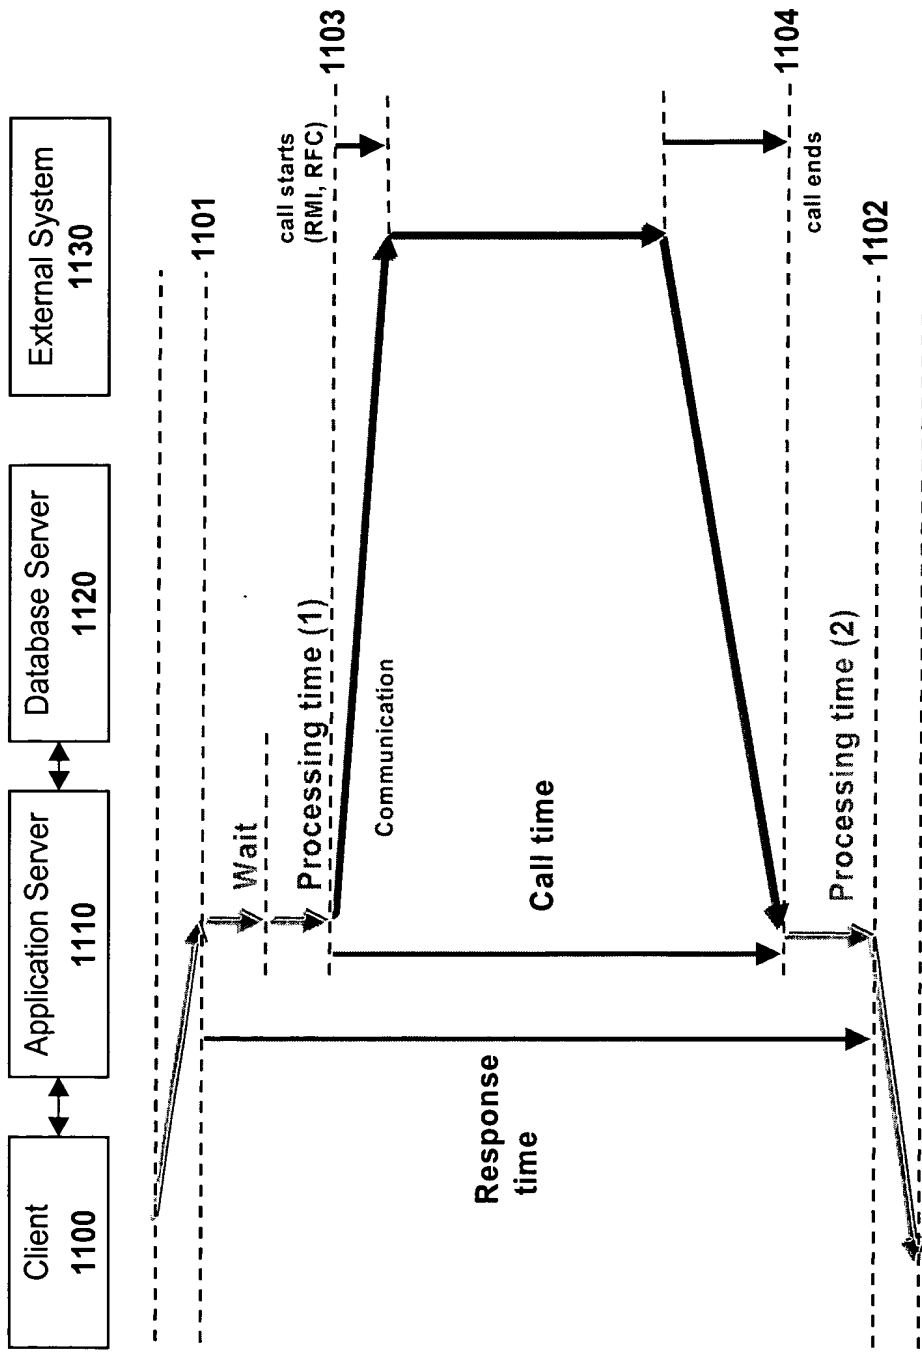


FIG. 11B



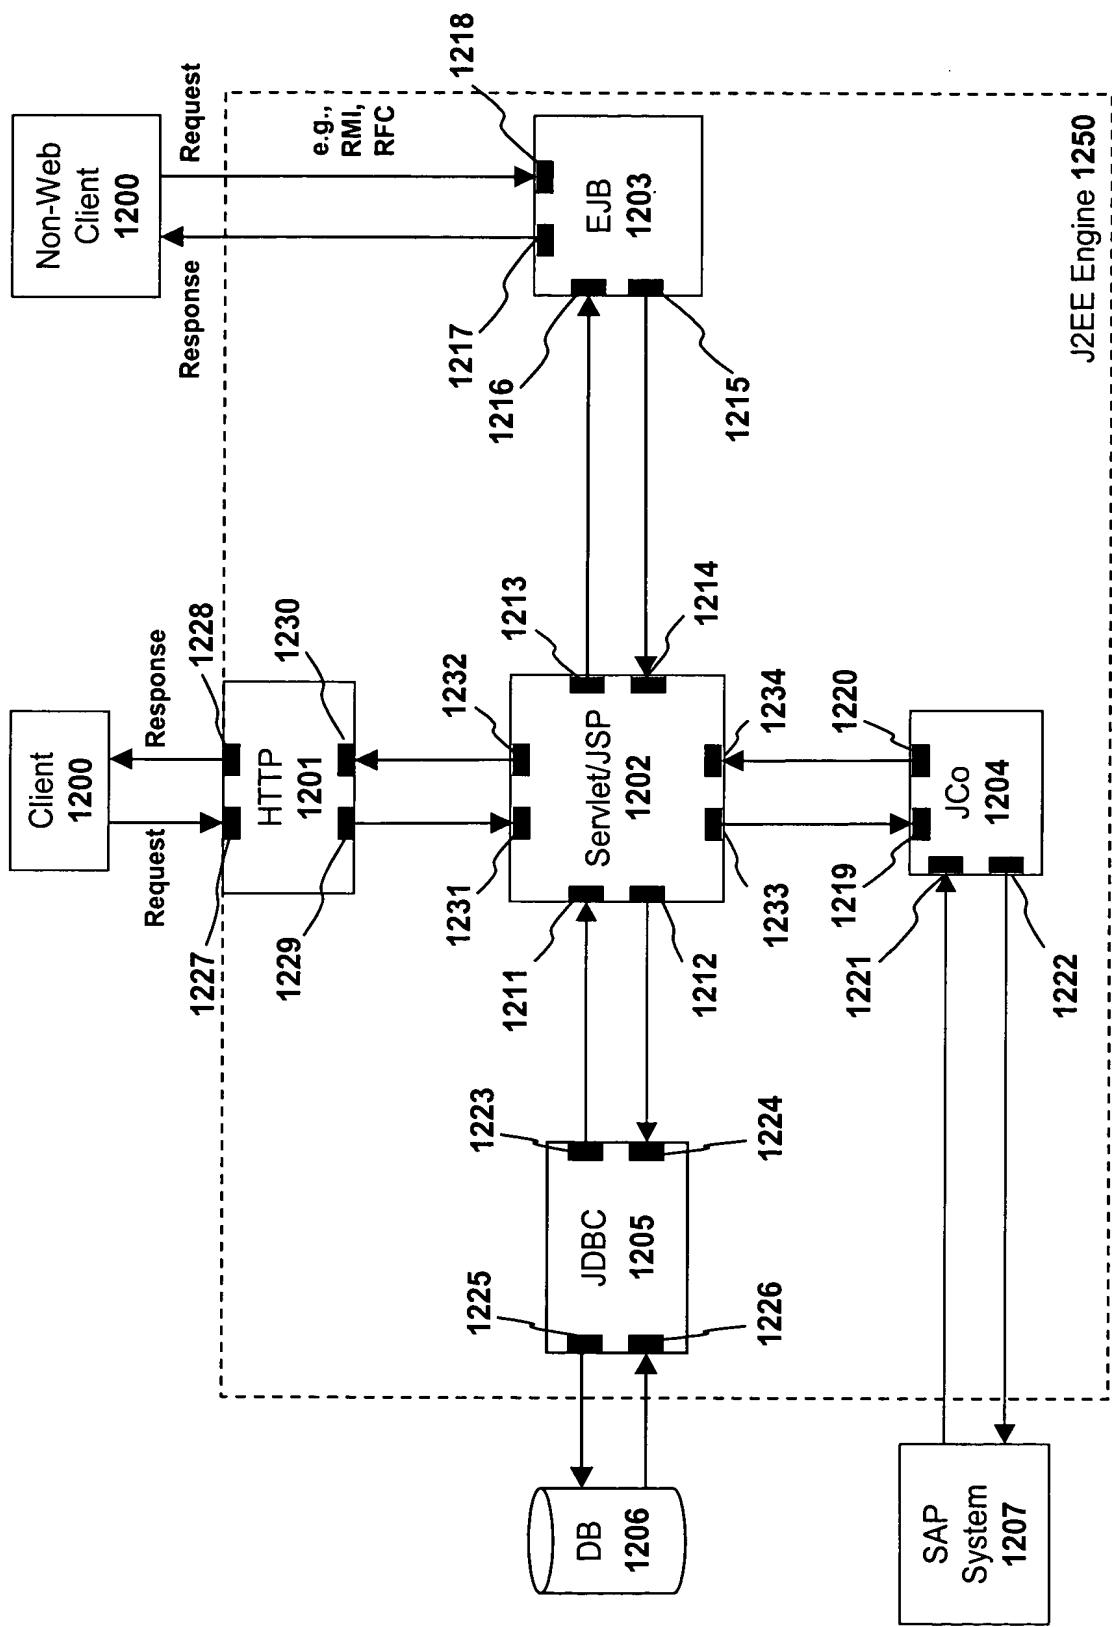


FIG. 12

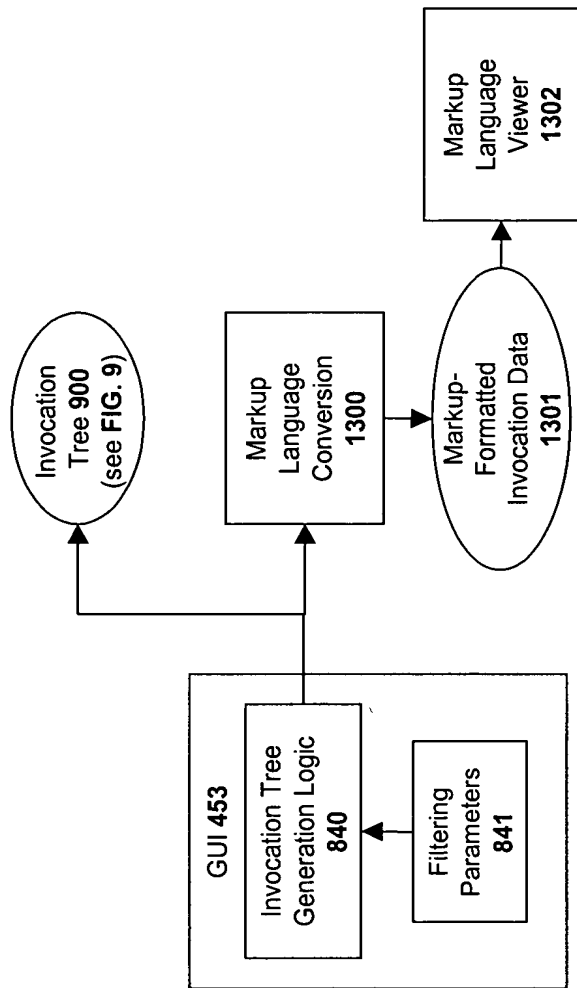


FIG. 13

FOR EACH CLASSFILE HAVING  
A METHOD TO BE MODIFIED:

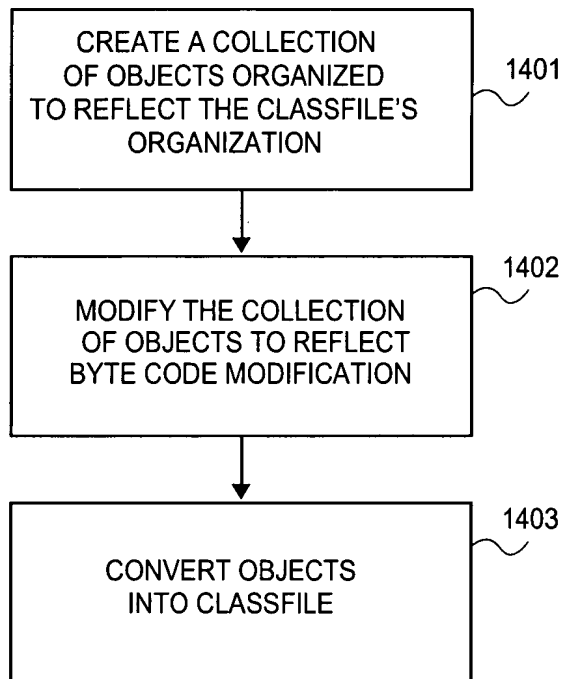


FIG. 14

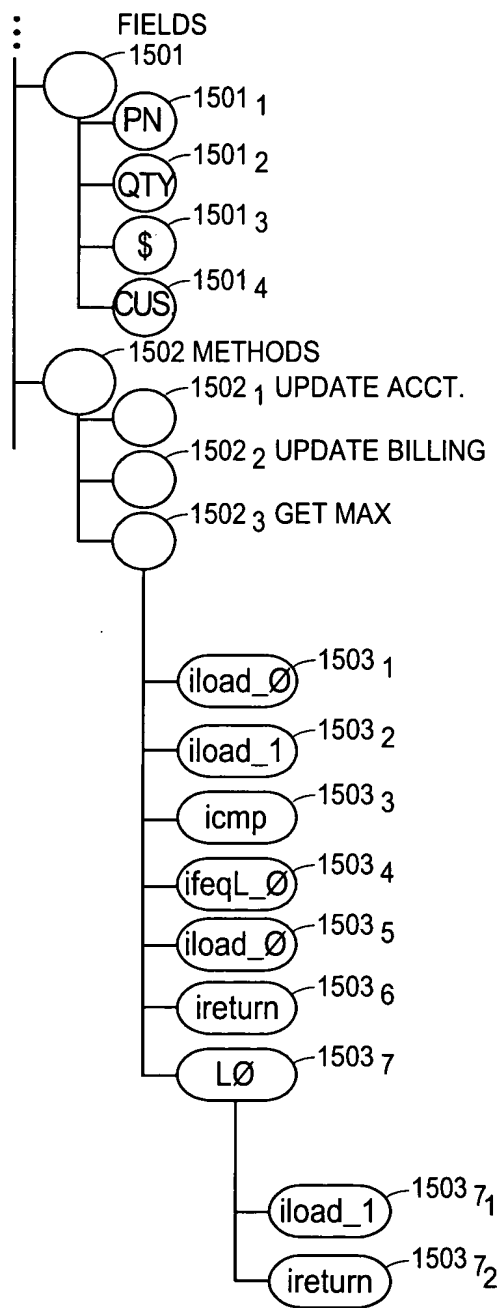


FIG. 15A

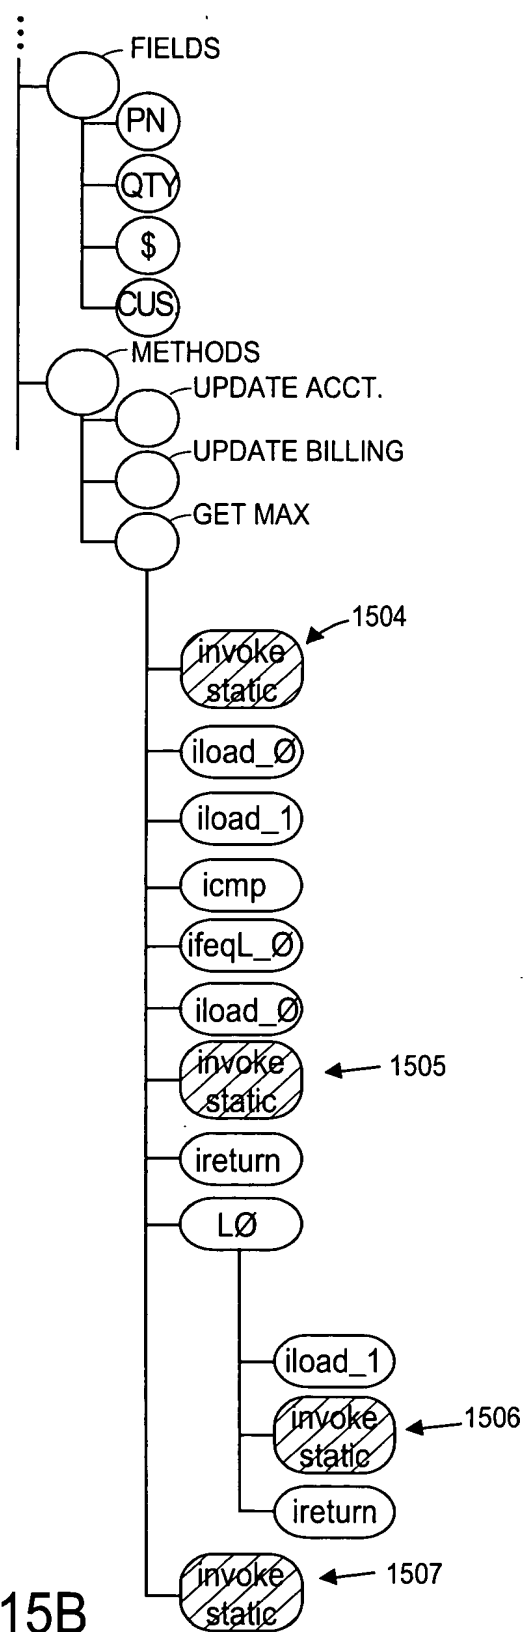


FIG. 15B

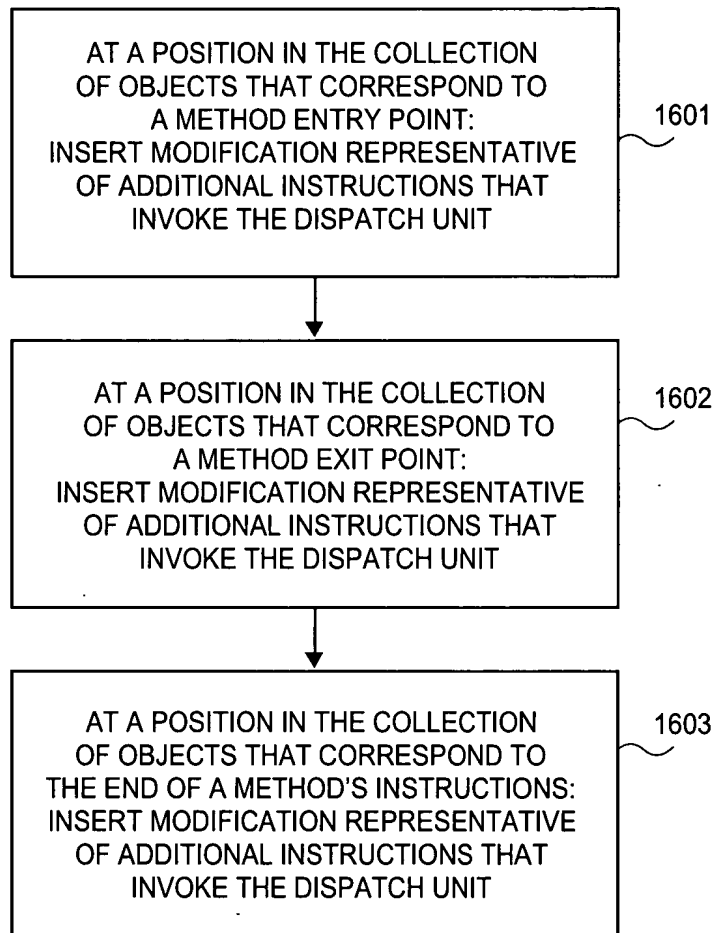


FIG. 16

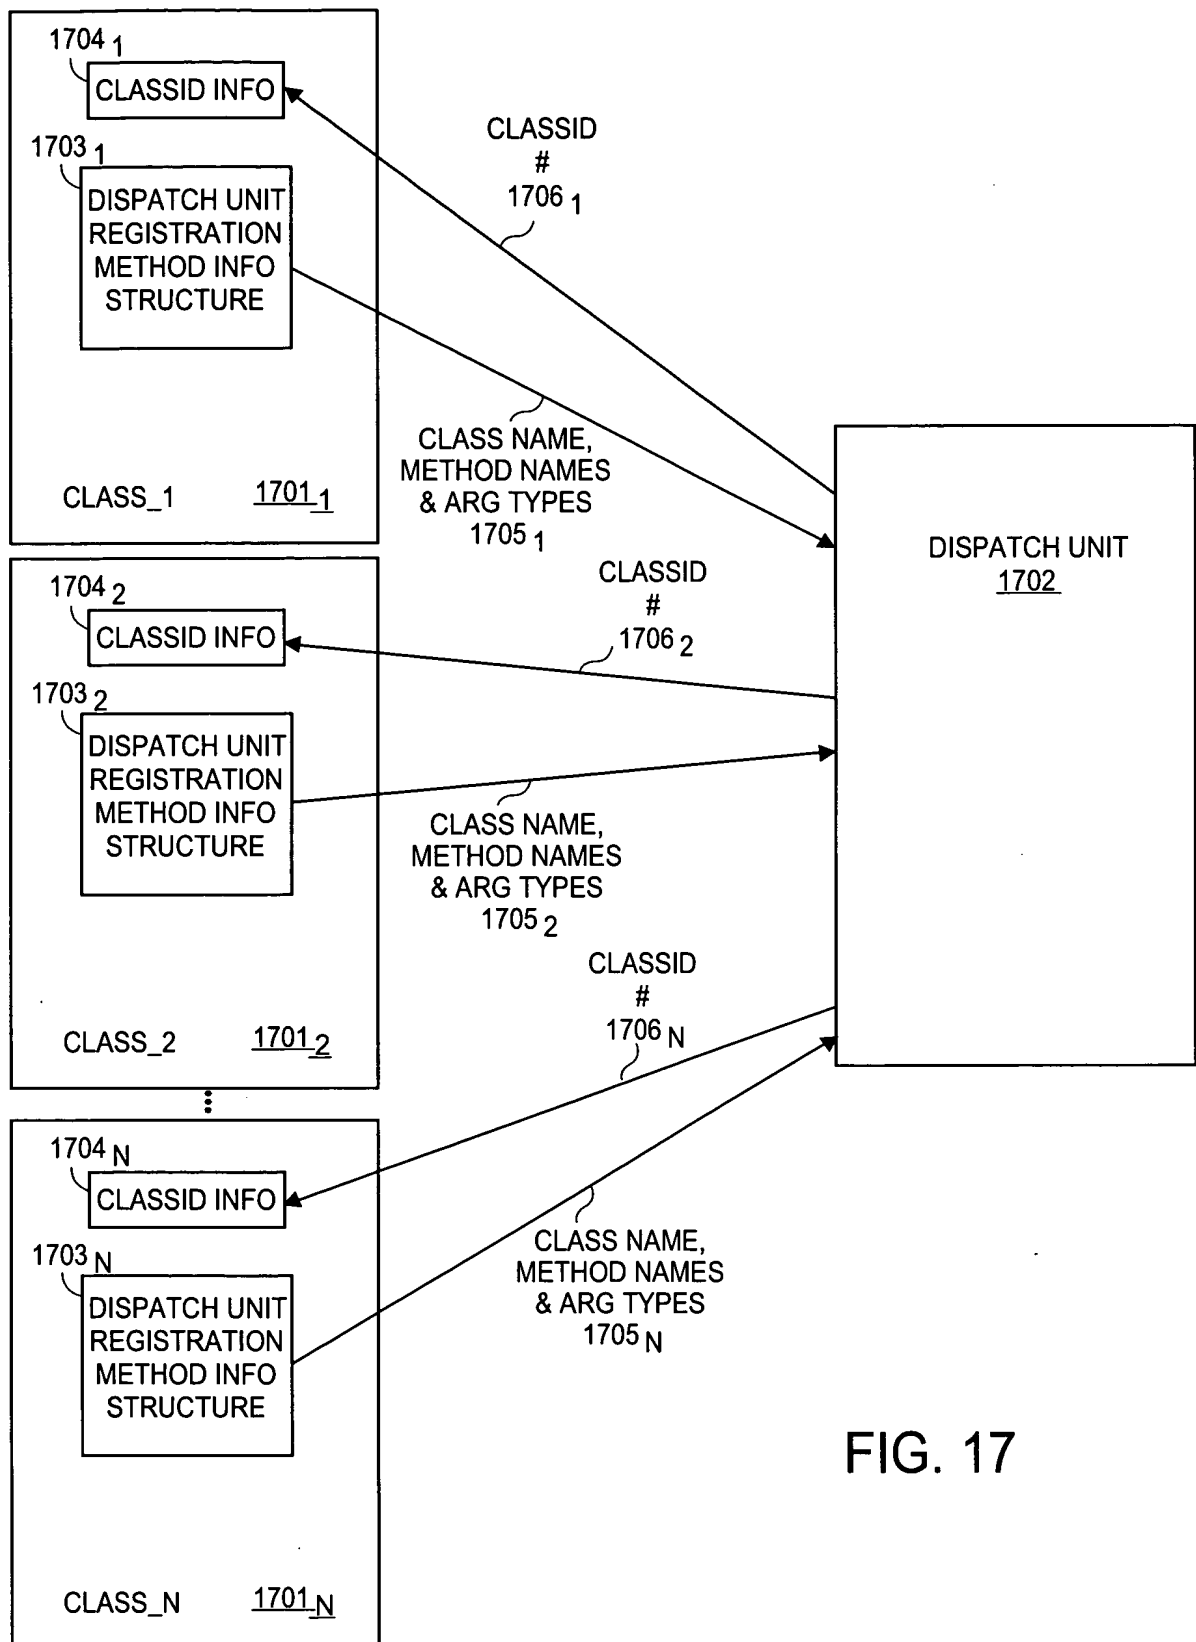


FIG. 17

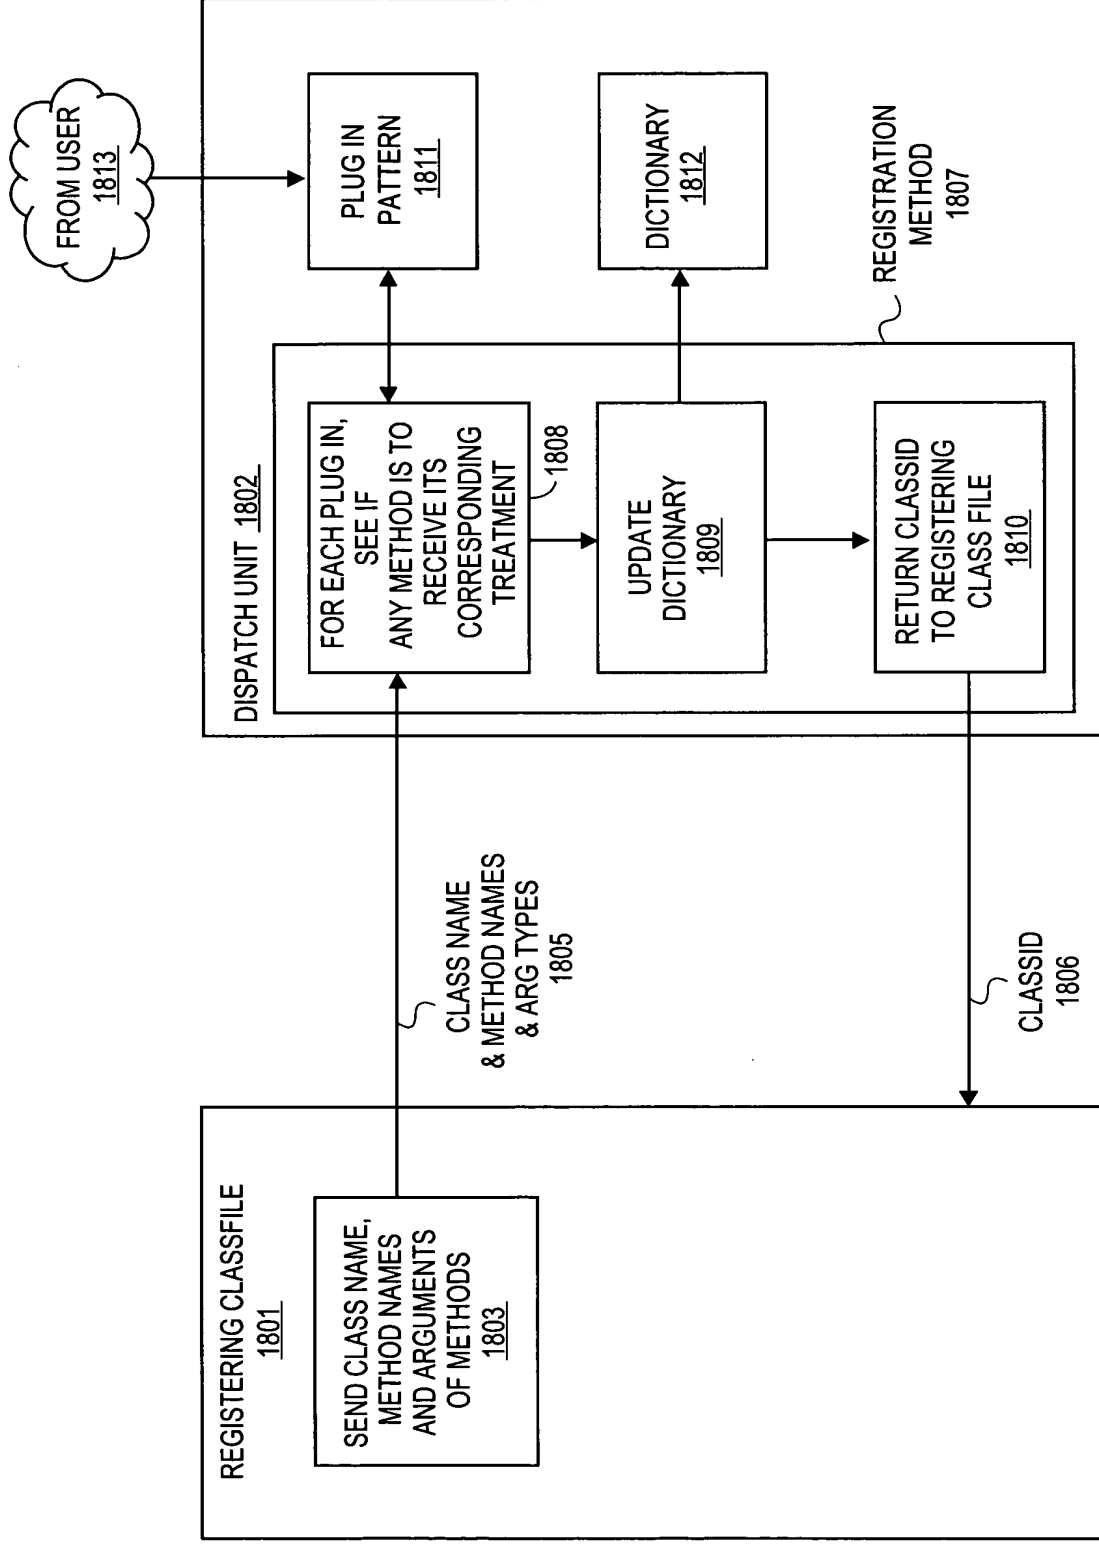


FIG. 18

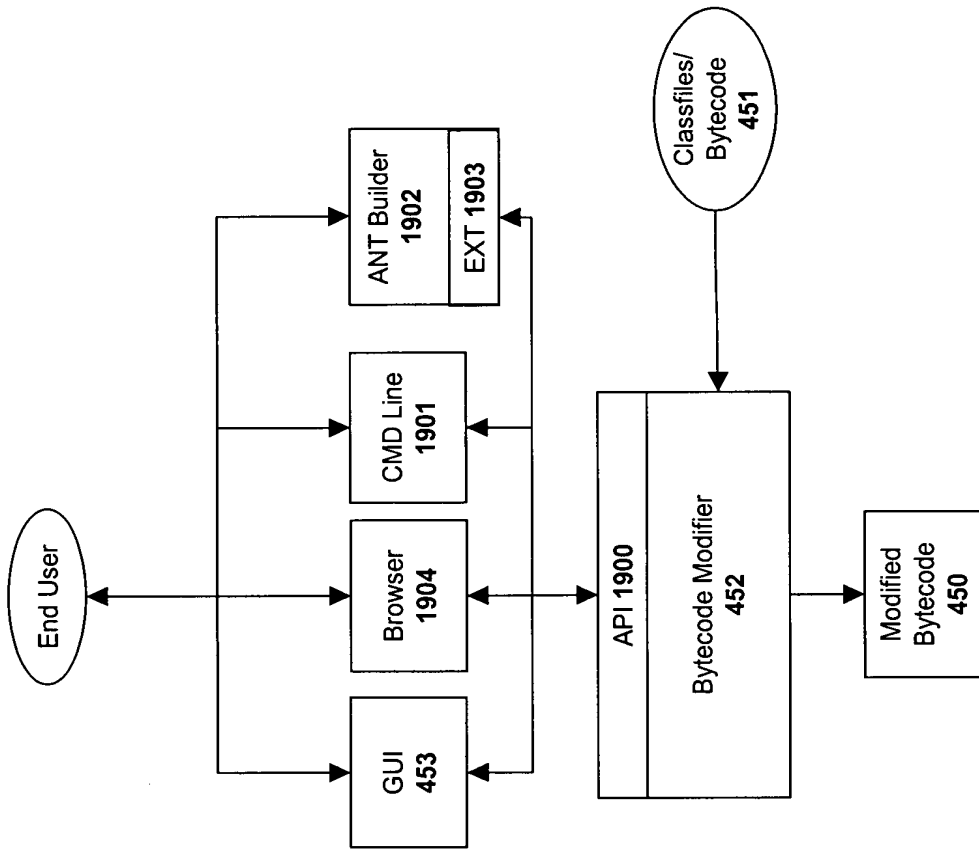


FIG. 19A




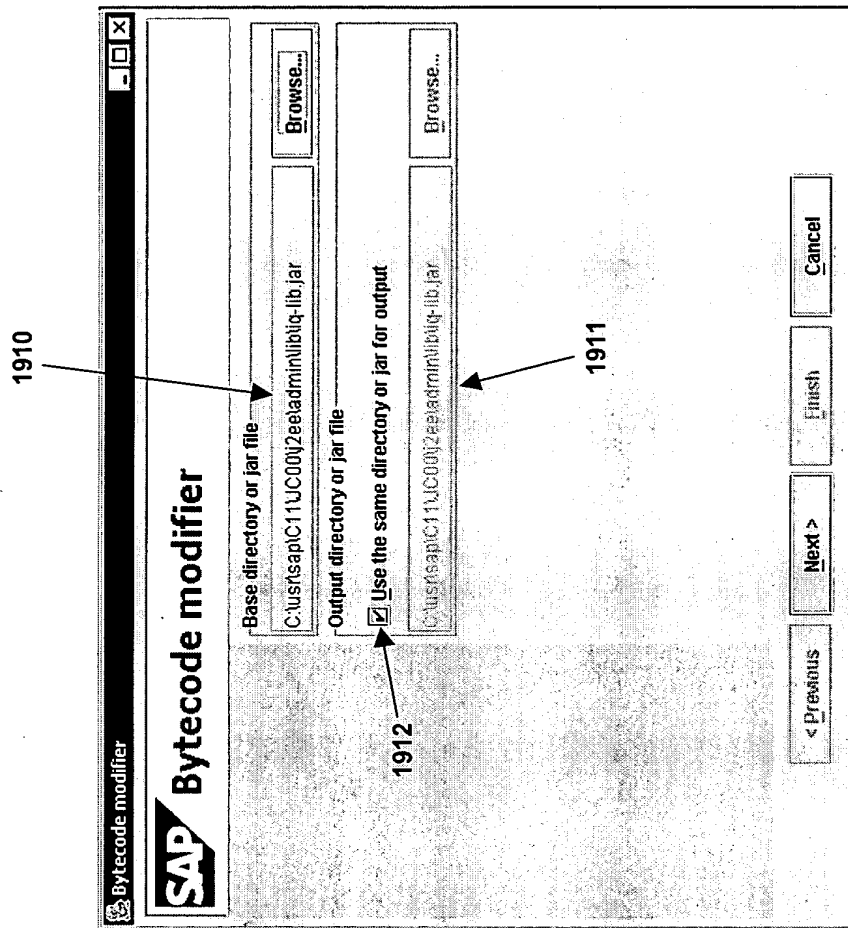


FIG. 19B

1921

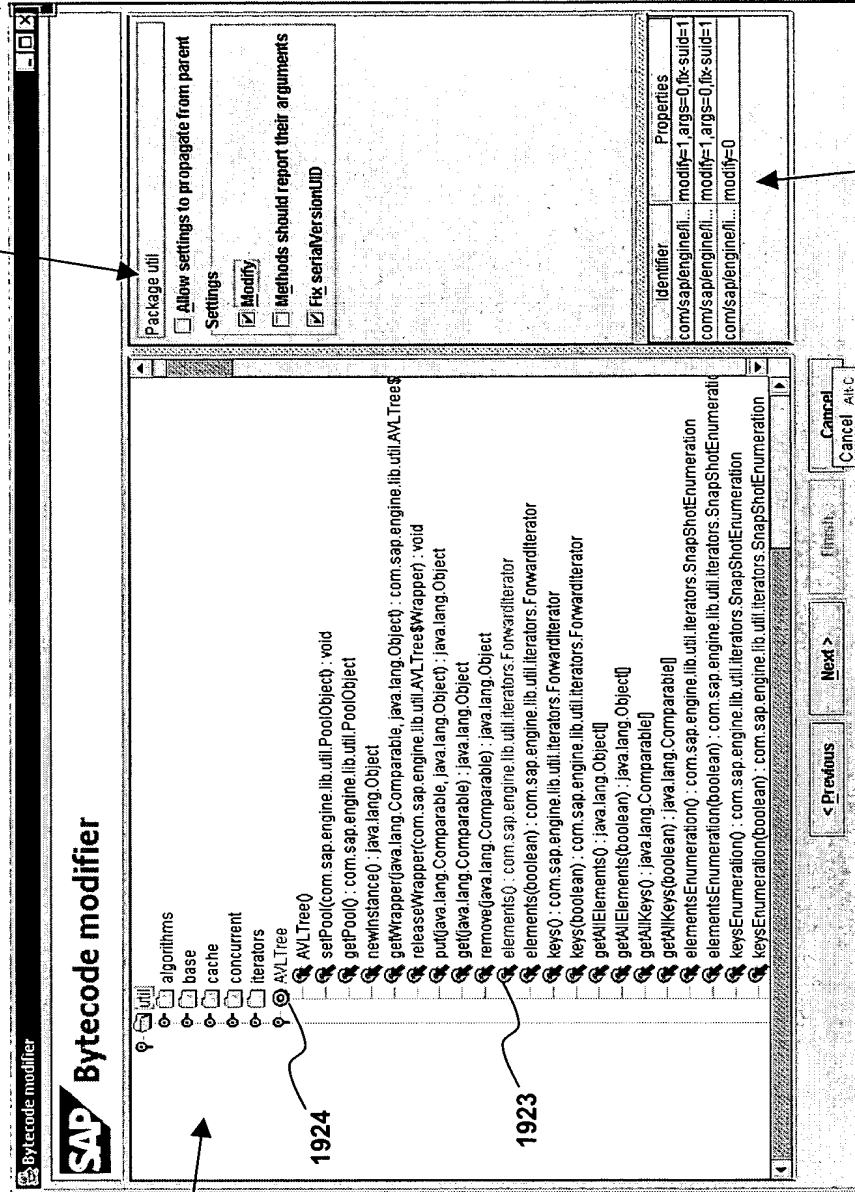

1920

1924

1923

1922

FIG. 19C


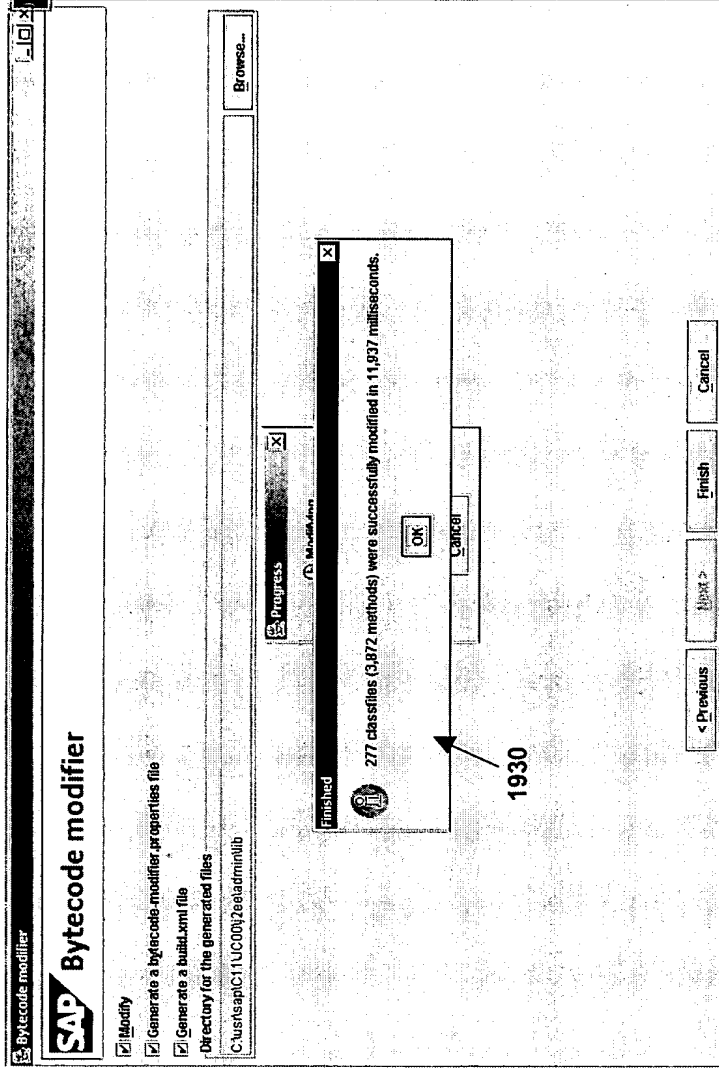


FIG. 19D

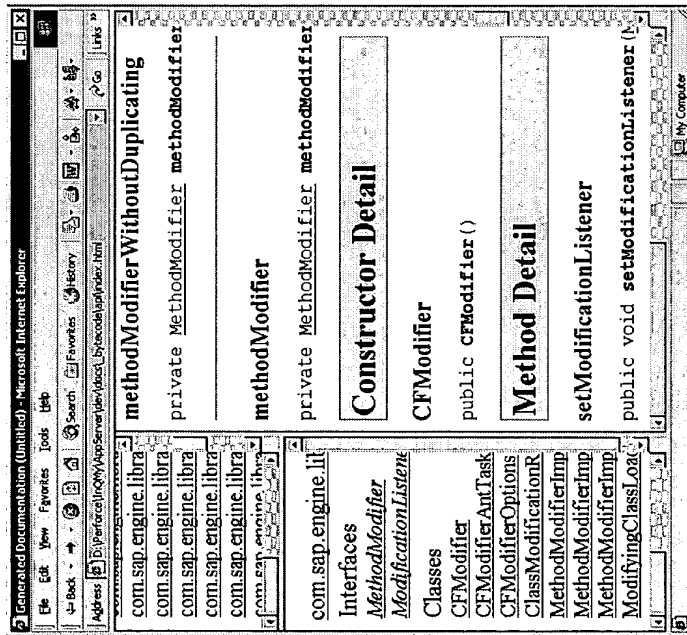

```
// Direct modification of a file
CFModifier modifier = new CFModifier();
modifier.modify("D:/temp/A.class", null);

// Modification in a classloader
Class defineModifiedClass(byte[] data) {
    CFModifier modifier = new CFModifier();
    byte[] data1 = modifier.modify(data);
    return defineClass(data1);
}
```



FIG. 19E

```

>java -classpath bytecode.jar com/sap/engine/library/bytecode/
Usage:
modify <conf-file> <input-file> [<output-file>]
Runs the bytecode modifier.
    <conf-file> The configuration file for the m
    <input-file> A jar file or a directory.
    <output-file> A jar file or a directory. By de
    <input-file> and <output-file> must either be both jar
  
```

1901

FIG. 19F

|                     |
|---------------------|
| ANT Builder<br>1902 |
| EXT 1903            |



```
<taskdef name="modify"
  classname="com.sap.engine.library.bytecode.modifier.ModifierTask"
  classpath="bytecode.jar"/>
<modify conf="bytecode-modifier.properties"
  inputFile="D:\temp\classes" outputFile="D:\temp\classes1"
  check="true" verbosity="2" failonerror="true"/>
```



1950

FIG. 19G